BAND PASS FILTER
SURFACE MOUNT MODEL FIS-60

OPTIMIZED BANDWIDTH — Fc = 60 MHz

SPECIFICATIONS:

Center Frequency:	60 MHz	**40 dB Bandwidth :**	19.0 - 180 MHz
Passband I. Loss :	1.5 dB (Max)	**Power Rating:**	1 Watt (Max)
Passband:	54.9 - 65.1 MHz	**Impedance :**	50 Ohms
20 dB Bandwidth :	42.0 - 78.0 MHz	**Operating Temp. Range:**	-20° to +70° C

MECHANICAL OUTLINE:102S

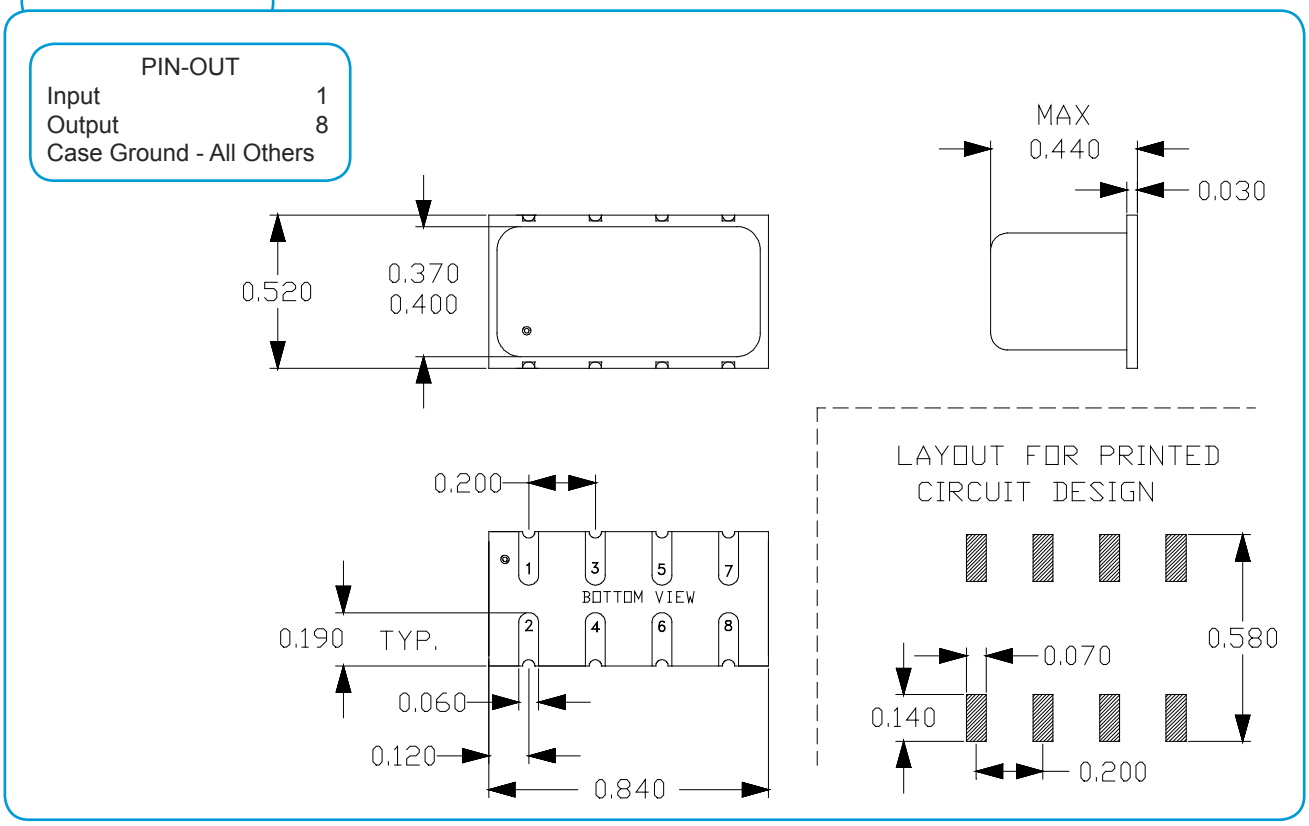

Copyright © 2003 Synergy Microwave Corporation
201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymwave.com • World Wide Web: http://www.synergymwave.com

SYNERGY® MICROWAVE CORPORATION

BAND PASS FILTER
SURFACE MOUNT MODEL FIS-60

OPTIMIZED BANDWIDTH — Fc = 60 MHz

PERFORMANCE PLOTS

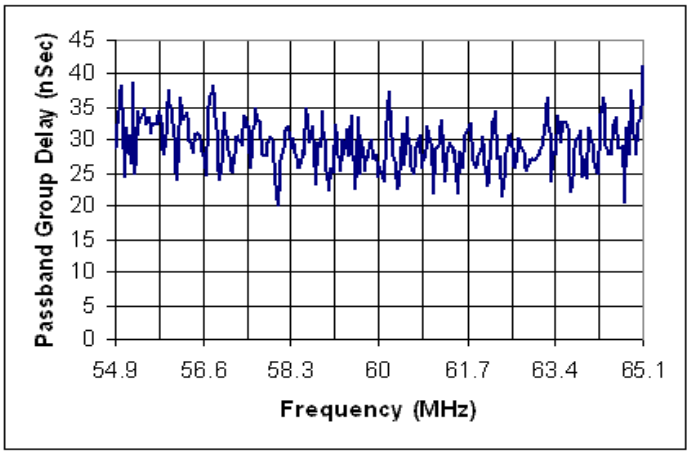

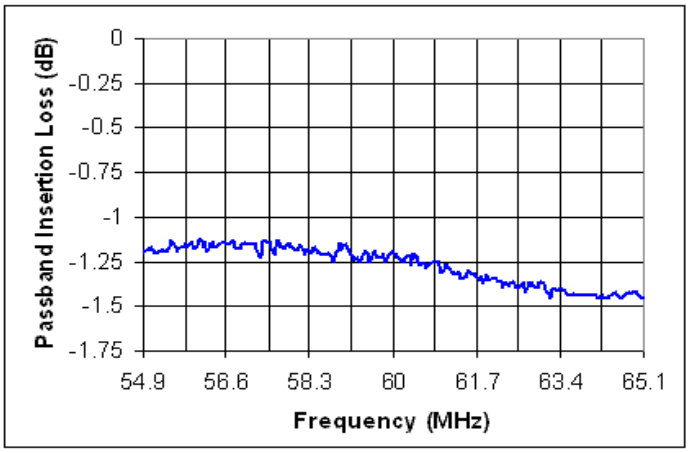

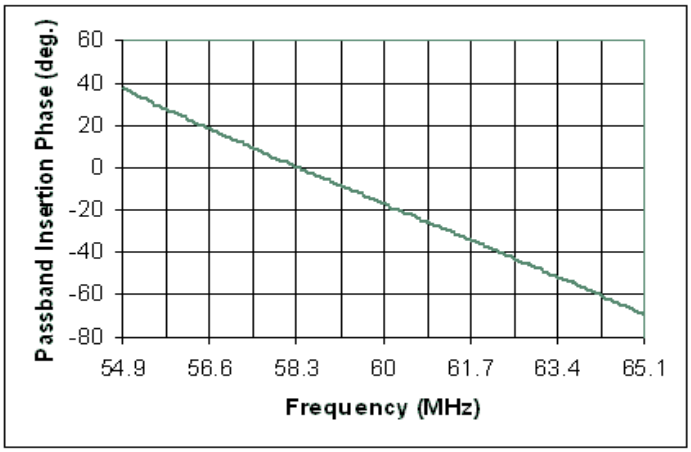

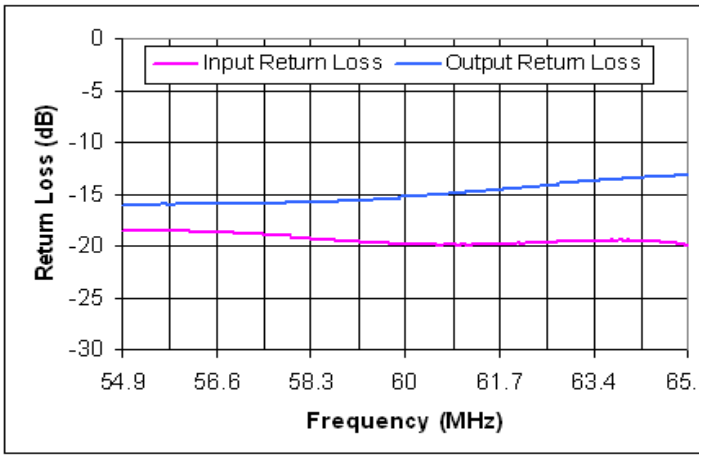

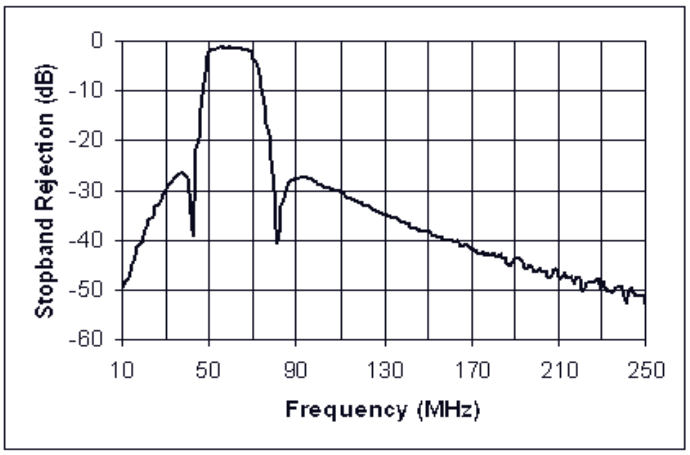

Copyright © 2003 Synergy Microwave Corporation
201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361
E-Mail: sales@synergymwave.com • World Wide Web: http://www.synergymwave.com