

# BAND PASS FILTER


## CONNECTORIZED MODEL: TFIS-70

**OPTIMIZED BANDWIDTH**

**F<sub>c</sub> = 70 MHz**


**FEATURES:**

- ▶ Low Loss
- ▶ Small Size
- ▶ High Rejection

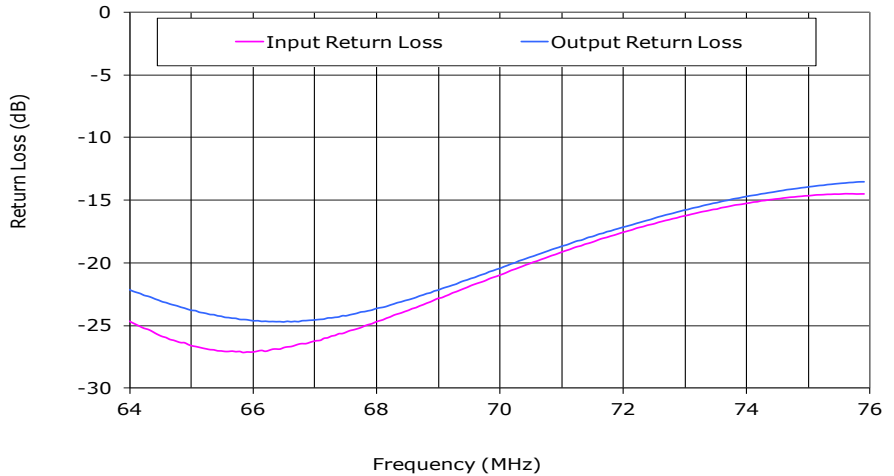

**SPECIFICATIONS**

<b>Center Frequency</b>	70 MHz
<b>Passband Loss</b>	1.5 dB
<b>Passband</b>	64.0 - 75.69 MHz
<b>20 dB Bandwidth</b>	49.0 - 91.69 MHz
<b>40 dB Bandwidth</b>	20.3 - 210 MHz
<b>Power Rating</b>	1 Watt (Max.)
<b>Impedance</b>	50 Ohms (Nom.)
<b>Operating Temperature Range</b>	-55 to +85 °C

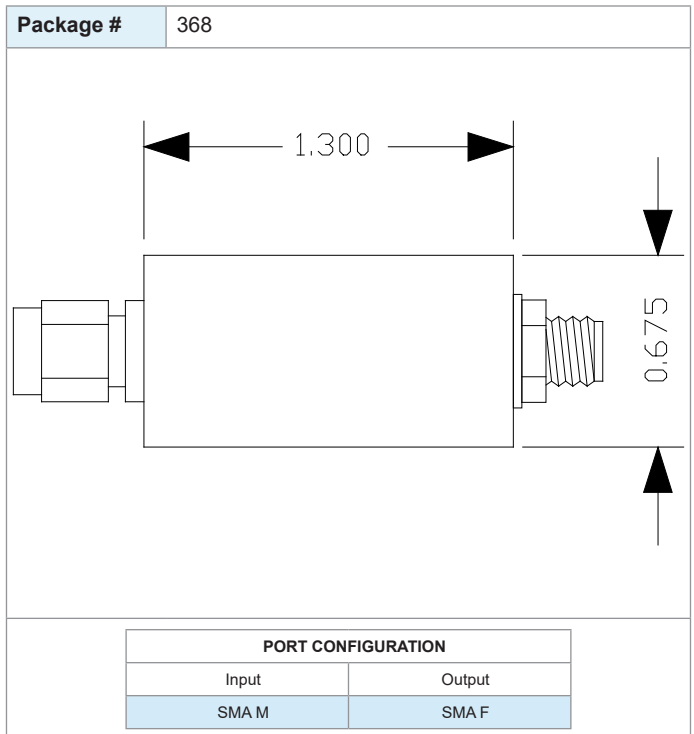



# BAND PASS FILTER

## CONNECTORIZED MODEL: TFIS-70

OPTIMIZED BANDWIDTH

$F_c = 70 \text{ MHz}$

PERFORMANCE PLOTS

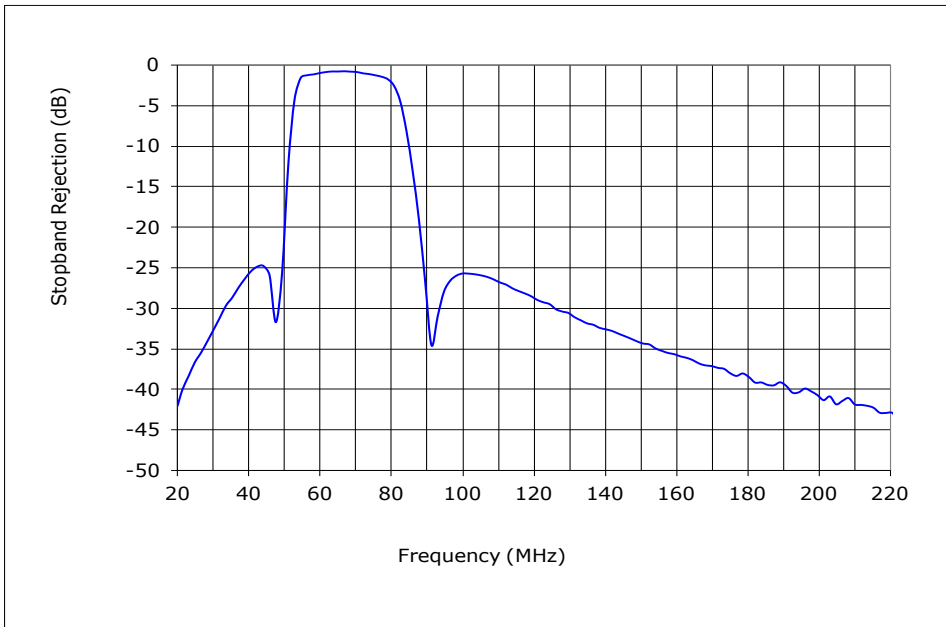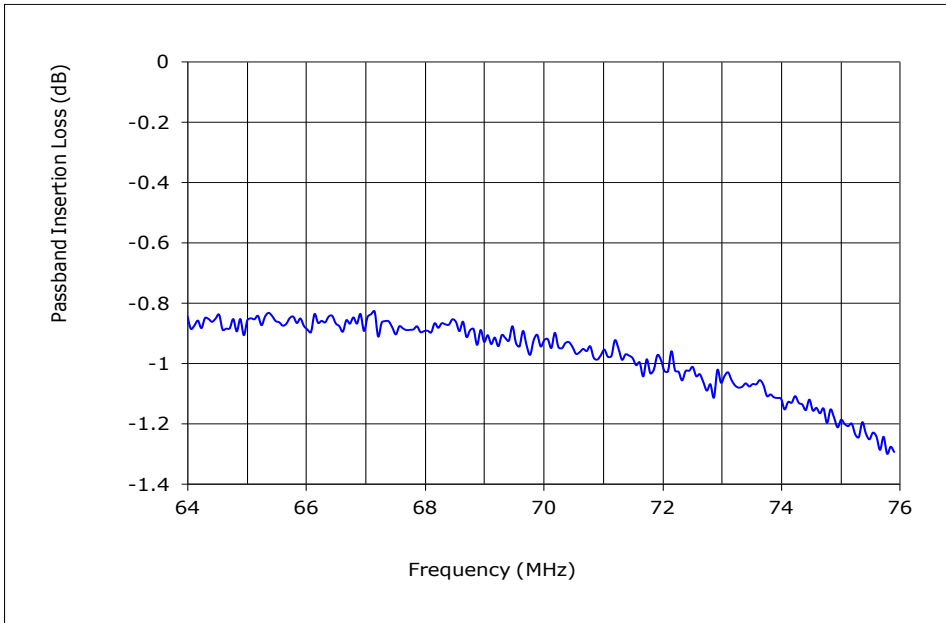

# BAND PASS FILTER

## CONNECTORIZED MODEL: TFIS-70

OPTIMIZED BANDWIDTH

$F_c = 70 \text{ MHz}$

PERFORMANCE PLOTS

