

2-WAY BRIDGE COMBINER / SPLITTER



SURFACE MOUNT MODEL: BCS7600

WIDE BANDWIDTH

70 - 5500 MHz

FEATURES:

- ▶ Low VSWR
- ▶ High Isolation
- ▶ Small Size, Surface Mount

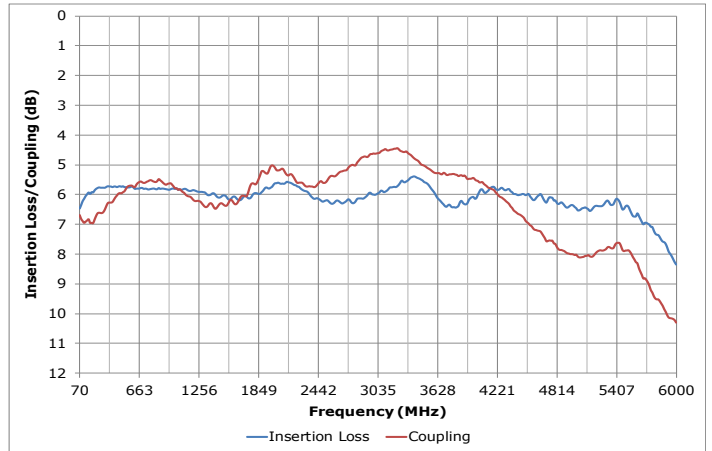

SPECIFICATIONS

Frequency	70 - 5500 MHz
Insertion Loss (dB)	6.0 ±2 dB
Isolation (dB)	25 dB (Typ.) / 15 dB (Min.)
VSWR	1.5:1 (Typ.)
Input Power Rating	0.5 Watt (Max.)
Output Impedance	50 Ohms (Nom.)
Operating Temperature Range	-40 to +85 °C

Package # 345

PORT CONFIGURATION			
Common Port	Out 1	Output	Ground
1	3	4	All other

2-WAY BRIDGE COMBINER / SPLITTER

SURFACE MOUNT MODEL: BCS7600

WIDE BANDWIDTH

70 - 5500 MHz

@ 25 °C

PERFORMANCE PLOTS

