

4-WAY POWER DIVIDER

SURFACE MOUNT MODEL: M4D3236

WIDE BANDWIDTH


3200 - 3600 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Wide Bandwidth
- ▶ Small Size, Surface Mount
- ▶ Moderate Power
- ▶ Lead Free RoHS Compliant
- ▶ Patented REL-PRO® Technology

APPLICATIONS:

- ▶ Signal Splitting & Low Power Combining

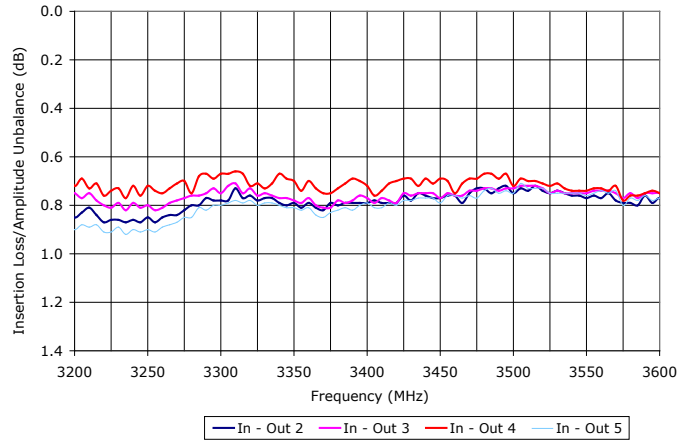

SPECIFICATIONS

Frequency	3200 - 3600 MHz	
Insertion Loss (dB) *	Typ.	Max.
	0.8	1.0
Isolation (dB)	Typ.	Min.
	23	17
Phase Unbalance	Typ.	Max.
	2.0°	5.0°
Amplitude Unbalance (dB)	Typ.	Max.
	0.2	0.5
Input Power **	1 Watt (Max.)	
VSWR	1.2:1 (Typ.)	
Impedance	50 Ohms (Nom.)	
Operating Temperature Range	-40 to +85 °C	
* Above 6.0 dB theoretical split loss.		
** Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.		

Package # 358

REL-PRO® Patent No. 7,612,296

TOLERANCES ON THREE DECIMAL PLACES= ± 0.015

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7200 & AN7301

PORT CONFIGURATION		
Input	Output	GND
1	2,3,4,5	All Others

4-WAY POWER DIVIDER



SURFACE MOUNT MODEL: M4D3236

WIDE BANDWIDTH

3200 - 3600 MHz

DATA @ 25°C

PERFORMANCE PLOTS

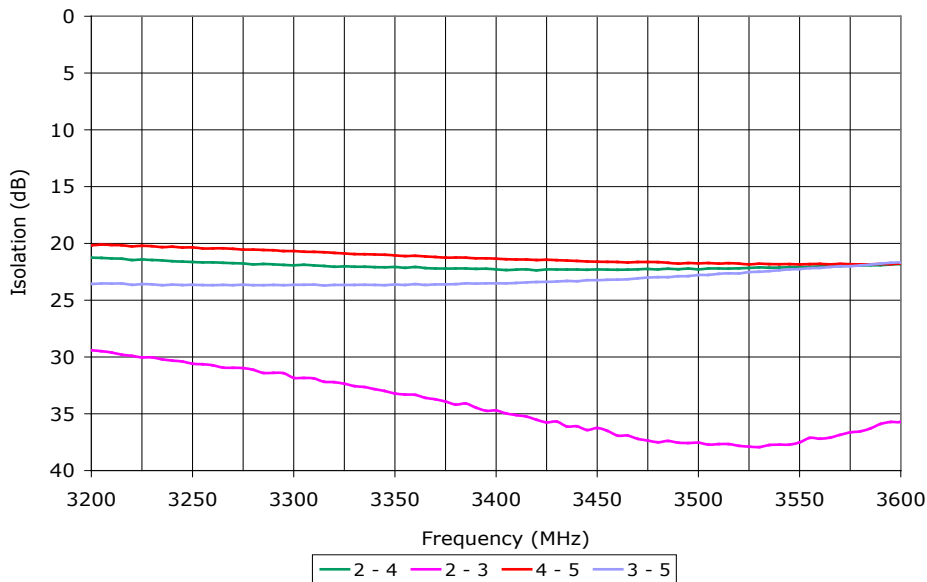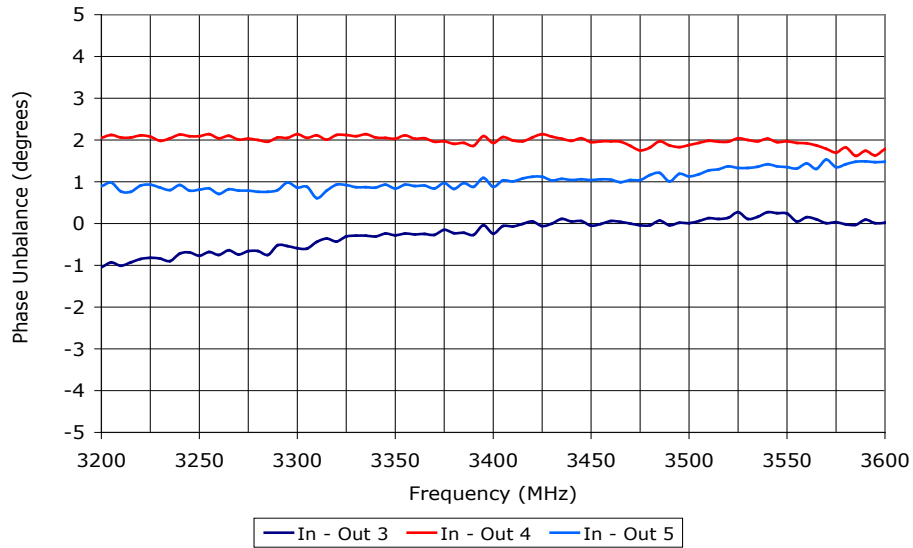


4-WAY POWER DIVIDER

SURFACE MOUNT MODEL: M4D3236

WIDE BANDWIDTH

3200 - 3600 MHz

DATA @ 25°C

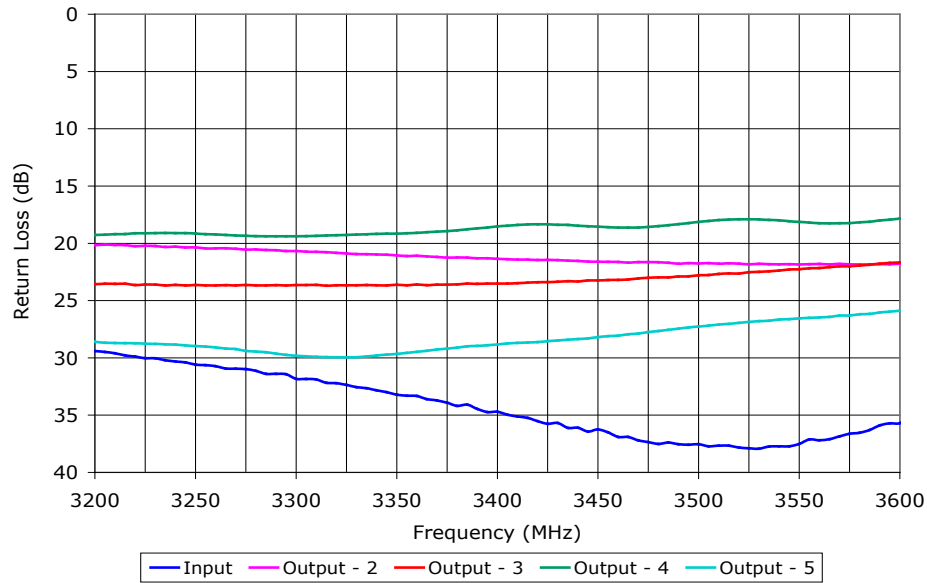

PERFORMANCE PLOTS