

BI-DIRECTIONAL COUPLER

CONNECTORIZED MODEL: KDCHP-255

WIDE BANDWIDTH



20 - 550 MHz

FEATURES:

- ▶ High Power Rating
- ▶ Low Insertion Loss
- ▶ Excellent Coupling Flatness
- ▶ High Directivity

APPLICATION:

- ▶ Antenna Signal Monitoring

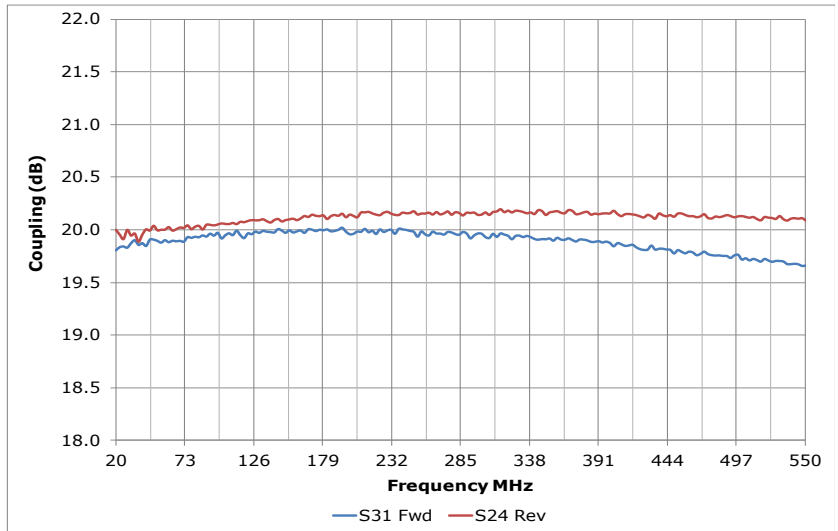

SPECIFICATIONS

Frequency	20 - 550 MHz		
Coupling	20 ±0.6 dB (Nom.)		
Coupling Flatness	±0.4 dB (Max.)		
Mainline Loss ¹	Freq. (MHz)	Typ.	Max.
	20 - 200	0.13	0.25
	200 - 400	0.17	0.28
	400 - 550	0.25	0.35
Directivity (dB) ²	Freq. (MHz)	Typ.	Min.
	20 - 200	25	20
	200 - 400	25	20
	400 - 550	23	20
Input Power Rating	Freq. (MHz)	Watts (Avg.)	
	20 - 350	30	
	350 - 550	25	
Impedance	50 Ohms (Nom.)		
VSWR	1.15:1 (Typ.) / 1.30:1 (Max.)		
Operating Temperature Range	-40 to +85 °C		
Storage Temperature Range	-55 to +100 °C		

¹ Including Coupling Loss.
² Directivity is the isolation value minus the coupling value.

Package # 363

All Dimensions in inches (mm)
 Tolerances: 2 PL.±0.030 inch. (0.762mm)
 3 PL.±0.015 inch. (0.381mm)

PORT CONFIGURATION			
Input	Output	FWD. Coupled	REV. Coupled
1	2	4	3

Functional Diagram



BI-DIRECTIONAL COUPLER

CONNECTORIZED MODEL: KDCHP-255

WIDE BANDWIDTH

20 - 550 MHz

PERFORMANCE PLOTS

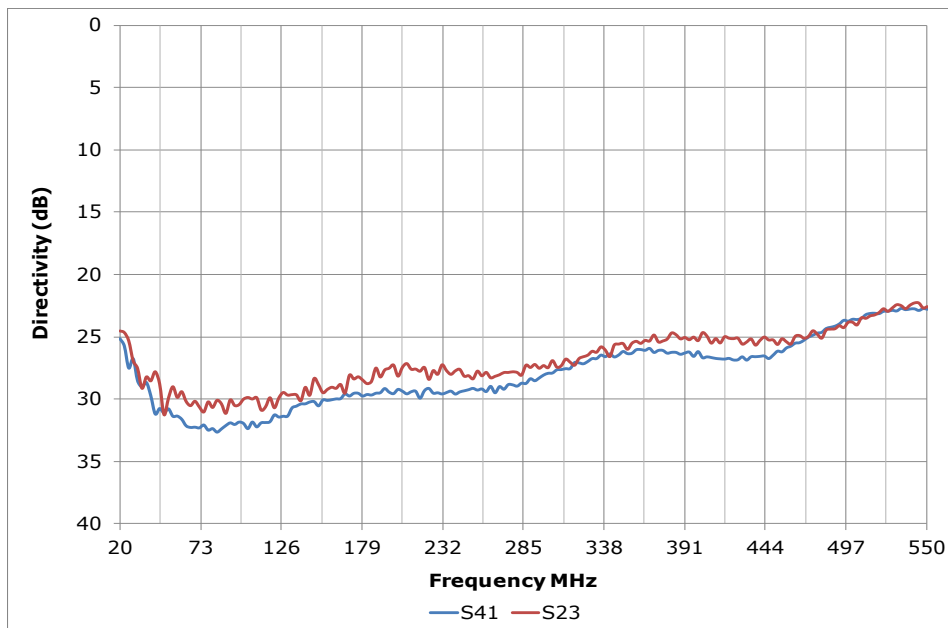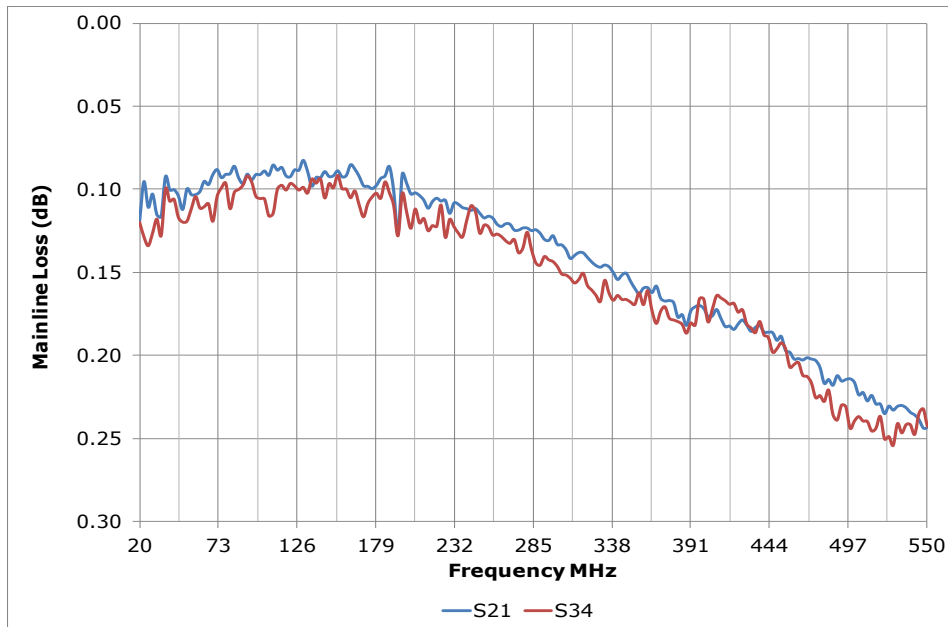


BI-DIRECTIONAL COUPLER

CONNECTORIZED MODEL: KDCHP-255

WIDE BANDWIDTH

20 - 550 MHz

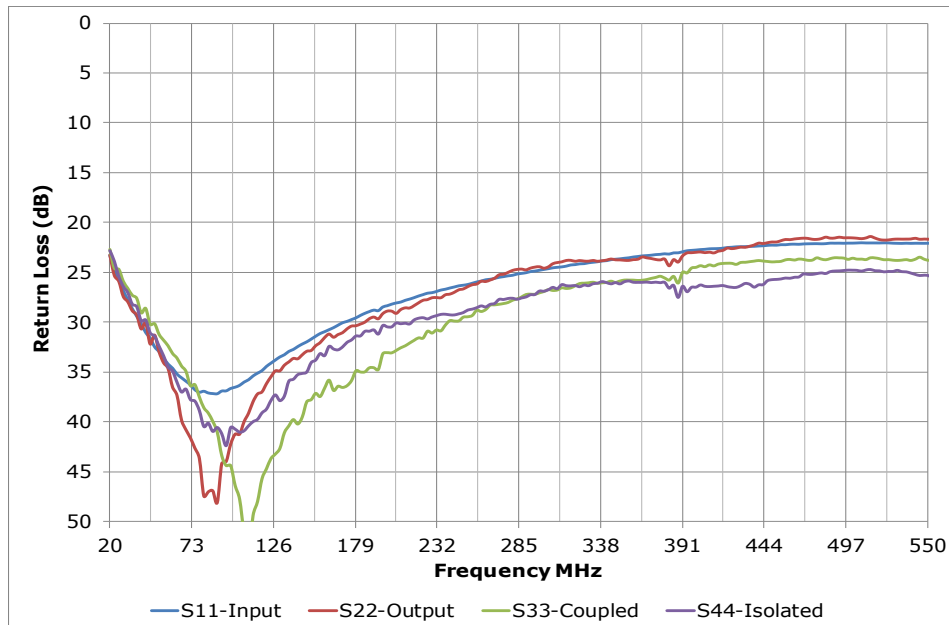

PERFORMANCE PLOTS