

# BI-DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: SDCHP-335

WIDE BANDWIDTH


30 - 350 MHz

**FEATURES:**

- ▶ High Power Rating
- ▶ Low Insertion Loss
- ▶ Good Coupling Flatness
- ▶ High Directivity

**APPLICATION:**

- ▶ Antenna Signal Monitoring

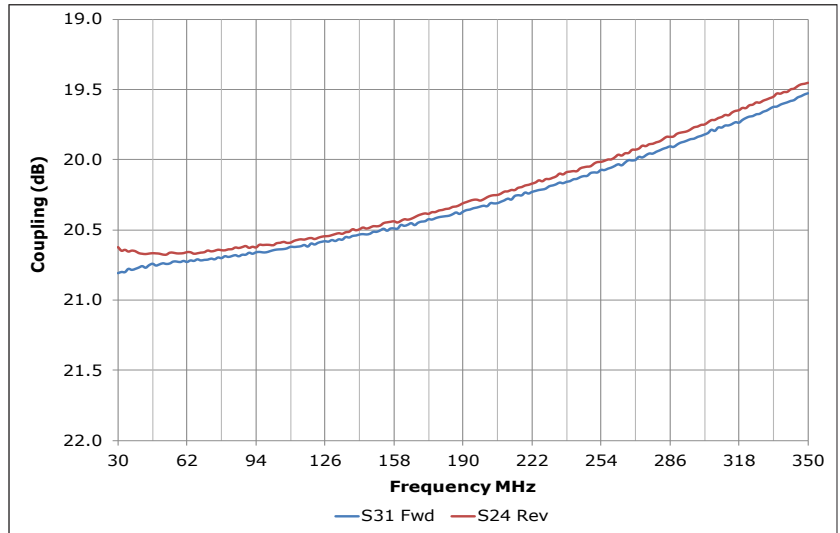

**SPECIFICATIONS**

Frequency	30 - 350 MHz		
Coupling	20.1 ±0.7 dB (Nom.)		
Coupling Flatness	±0.85 dB (Max.)		
Mainline Loss <sup>1</sup>	Freq. (MHz)	Typ.	Max.
	30 - 100	0.13	0.17
	100 - 200	0.17	0.23
Directivity (dB) <sup>2</sup>	Freq. (MHz)	Typ.	Min.
	30 - 100	19	17
	100 - 200	27	23
Input Power Rating	Freq. (MHz)	Watts (Avg.)	
	30 - 100	100	
	100 - 200	75	
200 - 350	50		
Impedance	50 Ohms (Nom.)		
VSWR	1.35:1 (Typ.) / 1.50:1 (Max.)		
Operating Temperature Range	-40 to +85 °C		
Storage Temperature Range	-55 to +100 °C		

<sup>1</sup> Including Coupling Loss.  
<sup>2</sup> Directivity is the isolation value minus the coupling value.

Package # 442

PORT CONFIGURATION				
Input	Output	FWD. Coupled	REV. Coupled	Gnd.
6	1	4	3	2,5



# BI-DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: SDCHP-335

WIDE BANDWIDTH

30 - 350 MHz

PERFORMANCE PLOTS

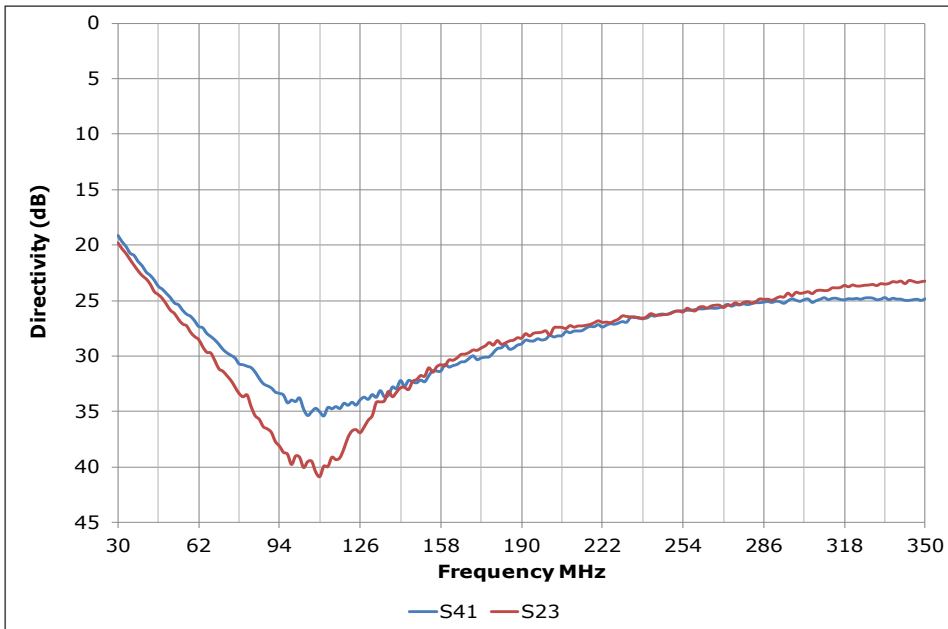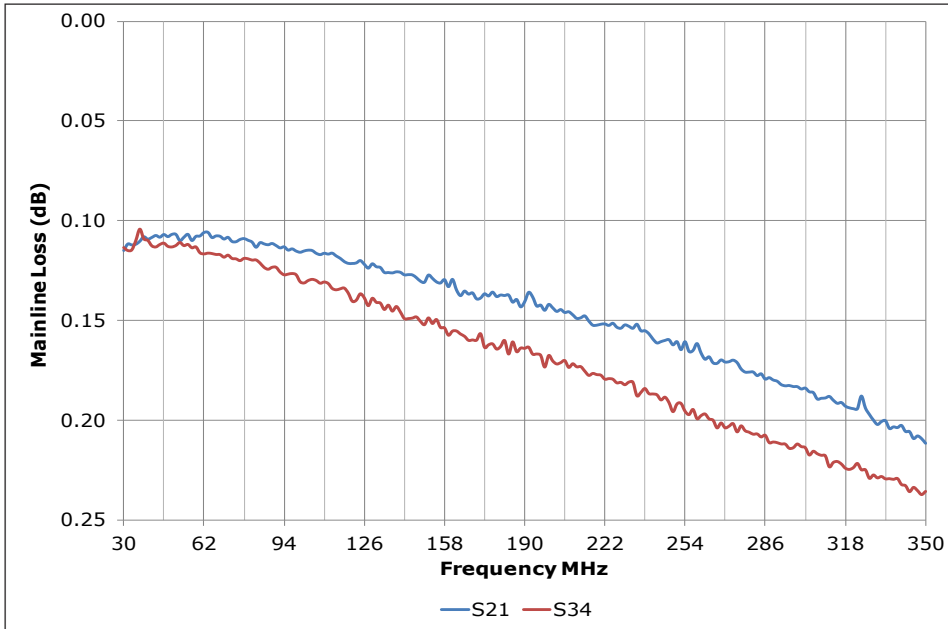


# BI-DIRECTIONAL COUPLER

## SURFACE MOUNT MODEL: SDCHP-335

WIDE BANDWIDTH

30 - 350 MHz

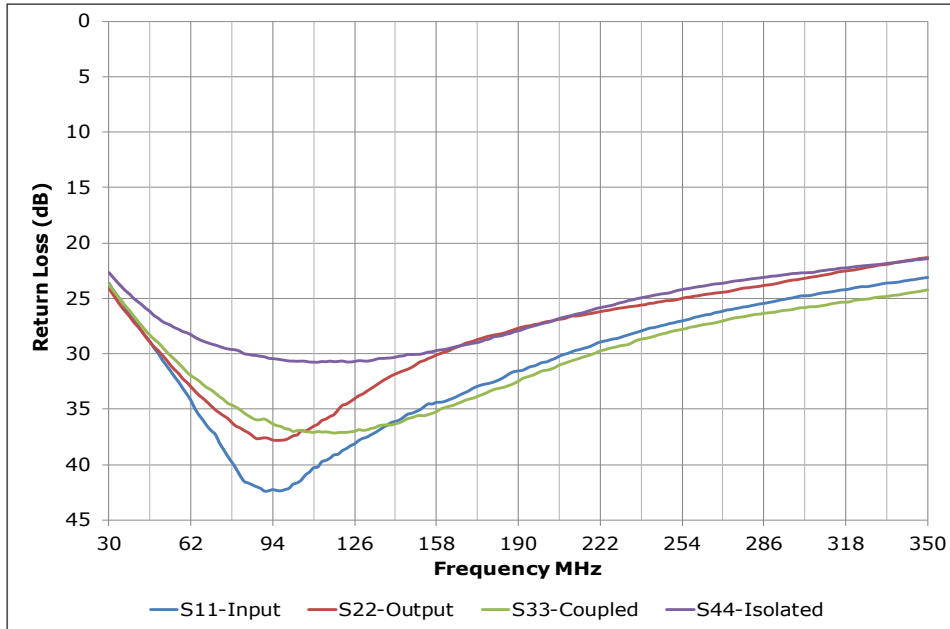

PERFORMANCE PLOTS