

LOW PASS FILTER



SURFACE MOUNT MODEL: FLHS-33

CUT-OFF FREQUENCY

F_c = 33 MHz

FEATURES:

- ▶ Optimum Performance

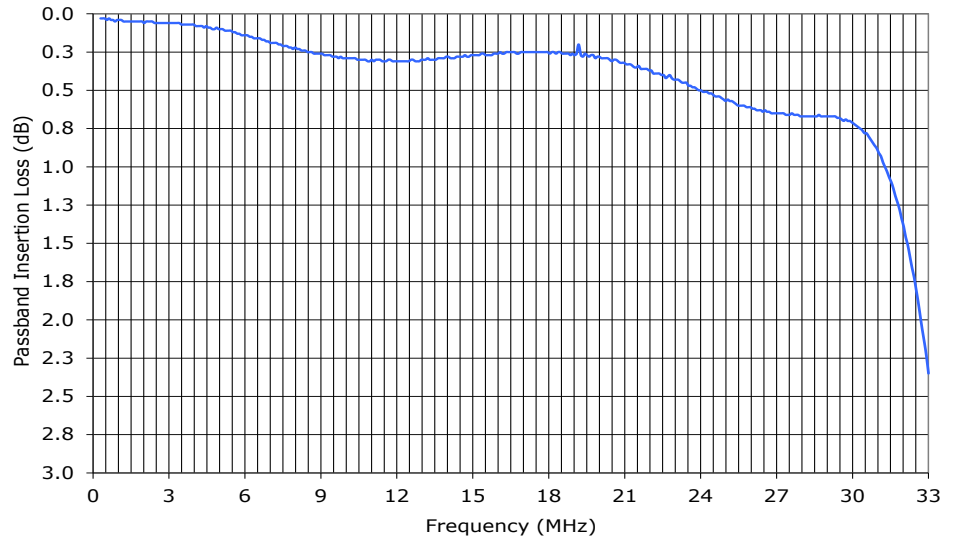

SPECIFICATIONS

Passband	DC-30 MHz	
3 dB Cut-off Frequency	33 MHz	
Passband Insertion Loss	2.0 dB (Max.)	
Stopband Frequencies	@ 58 MHz	50 dB (Min.)
	@ 51 MHz	30 dB (Min.)
	@ 44 MHz	20 dB (Min.)
Power Rating	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR (Passband)	1.7:1 dB (Typ.)	
Operating Temperature Range	-40 to +85 °C	

Package # 124S

PORT CONFIGURATION		
Input	Output	Gnd.
1	16	All Other

LOW PASS FILTER

SURFACE MOUNT MODEL: FLHS-33

CUT-OFF FREQUENCY

$F_c = 33$ MHz

PERFORMANCE PLOTS

