

LOW PASS FILTER


PLUG-IN MODEL: FLP-90

CUT-OFF FREQUENCY

F_c = 90 MHz


FEATURES:

- ▶ Small Size
- ▶ Optimum Performance

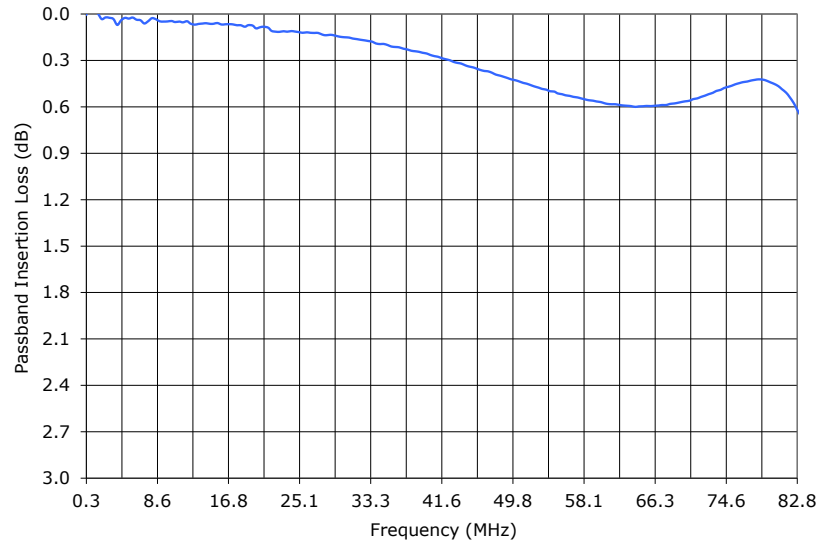

SPECIFICATIONS

Passband	DC - 82.8 MHz
3 dB Cut-off Frequency	90 MHz
Passband Insertion Loss	1.0 dB (Max.)
Stopband Frequencies	@ 156 MHz 35 dB (Min.)
	@ 140 MHz 23 dB (Min.)
	@ 120 MHz 20 dB (Min.)
Input Power Rating	1 Watt (Max.)
Impedance	50 Ohms (Nom.)
VSWR (Passband)	1.7:1 dB (Typ.)
Operating Temperature Range	-55 to +100 °C

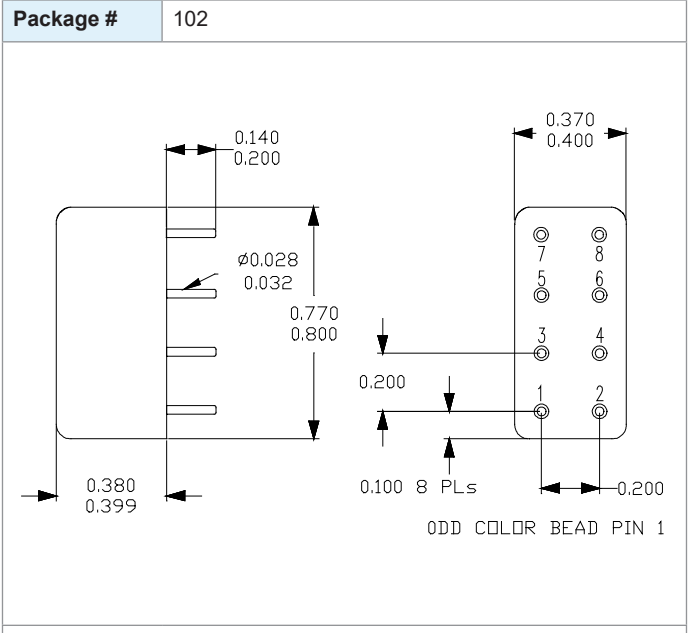



Port Configuration		
Input	Output	Gnd.
1	8	All Other

LOW PASS FILTER

PLUG-IN MODEL: FLP-90

CUT-OFF FREQUENCY

$F_c = 90 \text{ MHz}$

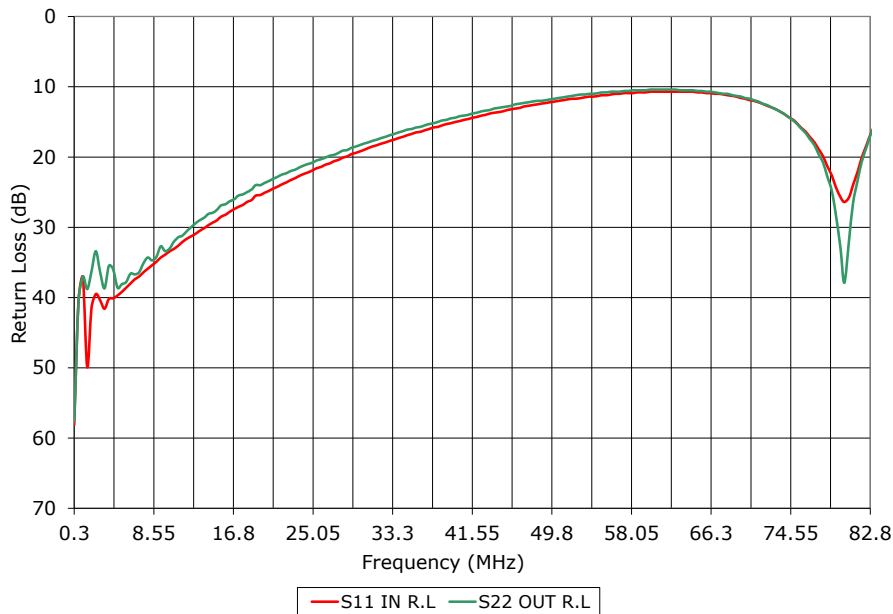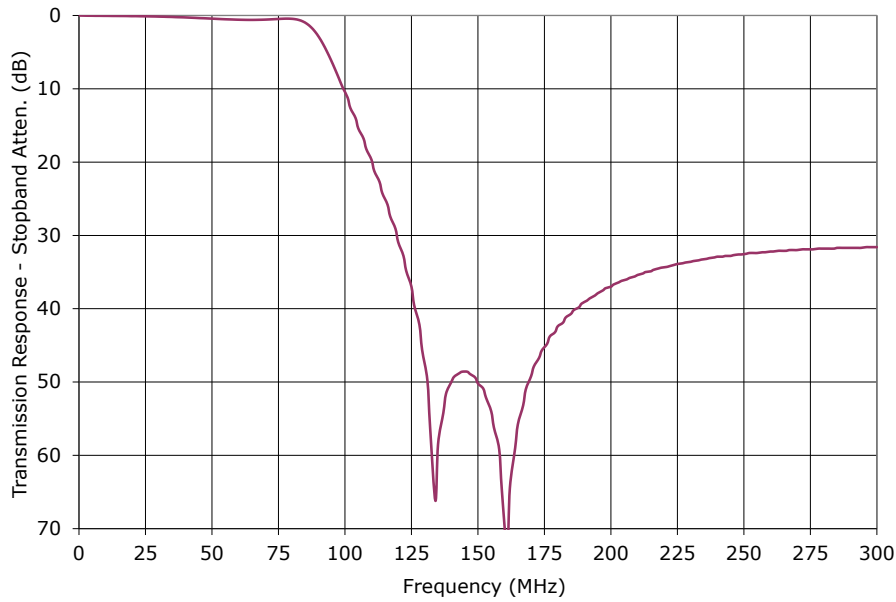

PERFORMANCE PLOTS





LOW PASS FILTER

PLUG-IN MODEL: FLP-90

CUT-OFF FREQUENCY

$F_c = 90 \text{ MHz}$

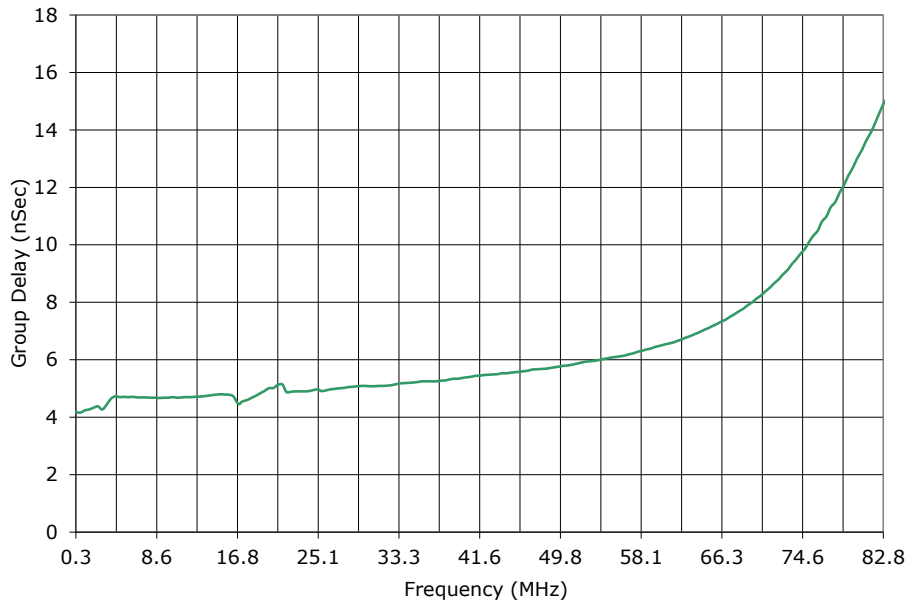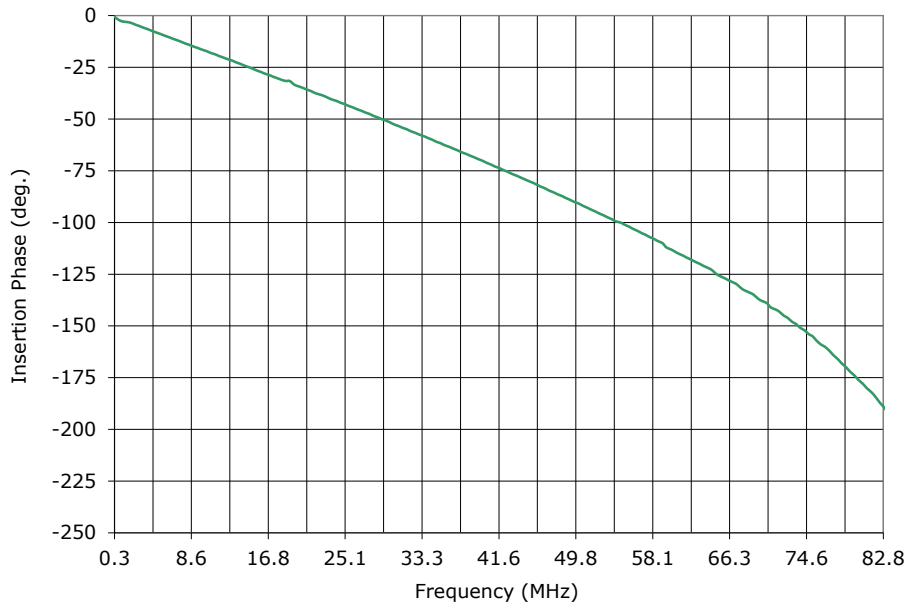

PERFORMANCE PLOTS