

90° HYBRID

SURFACE MOUNT MODEL: DQS-30-750-1

WIDE BANDWIDTH

30 - 520 MHz


FEATURES:

- ▶ Ultra-Wide Bandwidth (>17:1)
- ▶ Small Size Surface Mount
- ▶ Building Block For:
 - Power Amplifiers
 - Image Reject Mixers
 - I & Q / SSB Modulators
 - Phase Shifters & More...



SPECIFICATIONS

Frequency	30 - 520 MHz	
Insertion Loss (dB)	Typ.	Max.
	1.8	2.5
Amplitude Unbalance (dB)	Typ.	Max.
	±0.8	±1.3
Phase Unbalance (Deg.)	Typ.	Max.
	±5.0	±10.0
Isolation (dB)	Typ.	Min.
	18	13
Power Rating	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.5:1 (Typ.)	
Operating Temperature Range	-40 to +85°C	
Storage Temperature Range	-55 to +100°C	

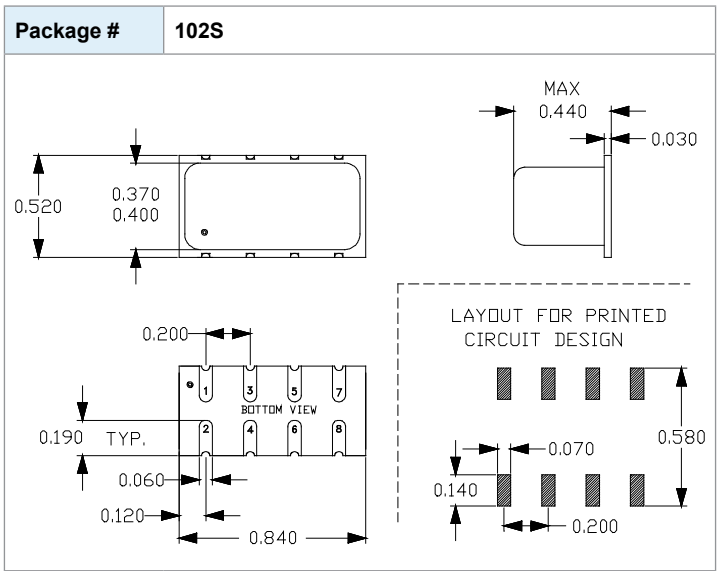

PORT CONFIGURATION				
Input	Isolated*	+90° Output*	0° Output	GND**
1	2	8	7	3,4,5,6

*Terminate ISOLATED port in 50 Ohms EXTERNALLY.
 **Ground Externally



90° HYBRID

SURFACE MOUNT MODEL: DQS-30-750-1

WIDE BANDWIDTH

30 - 520 MHz

Data @ 25°C

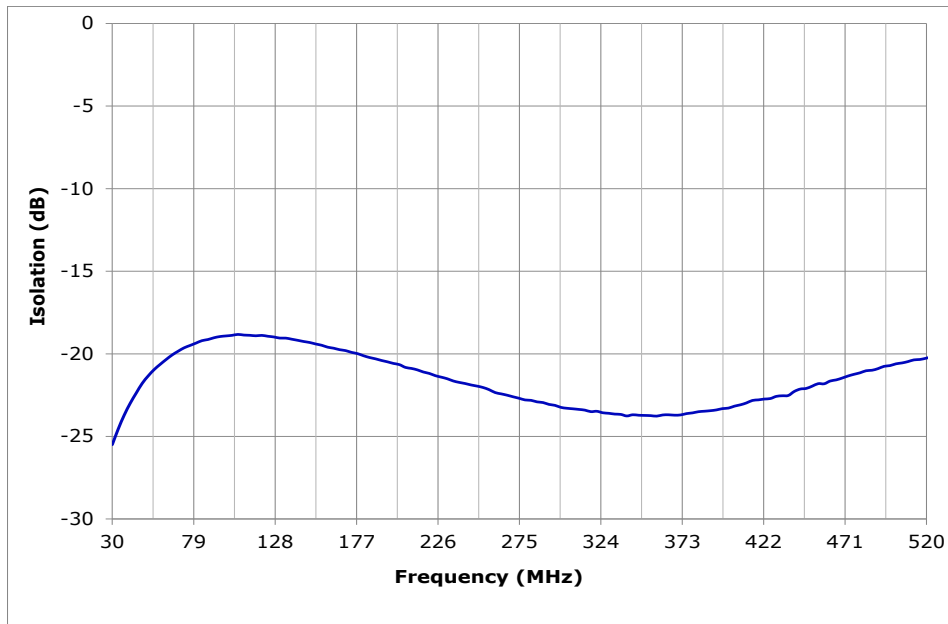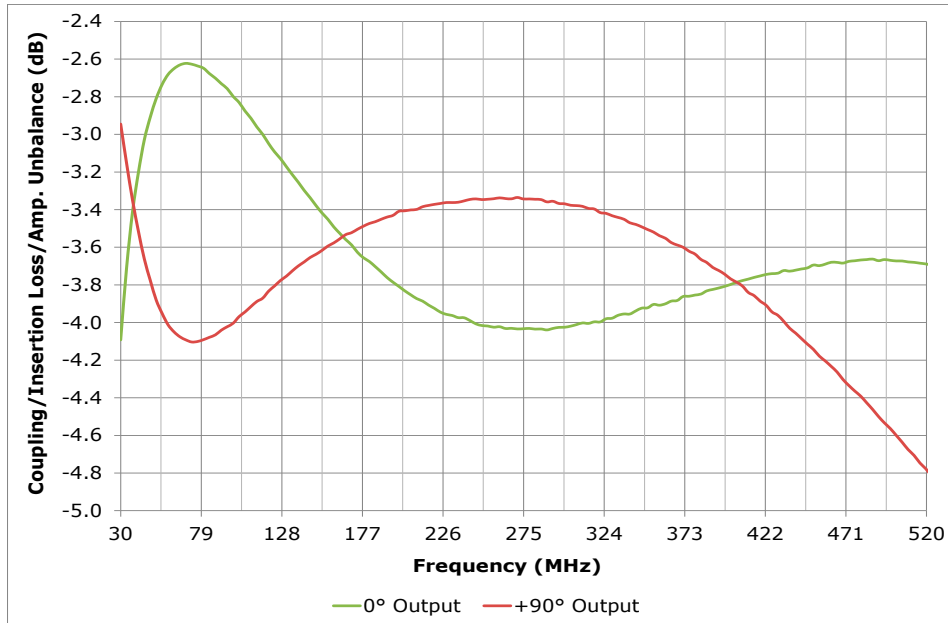

PERFORMANCE PLOTS



90° HYBRID

SURFACE MOUNT MODEL: DQS-30-750-1

WIDE BANDWIDTH

30 - 520 MHz

Data @ 25°C

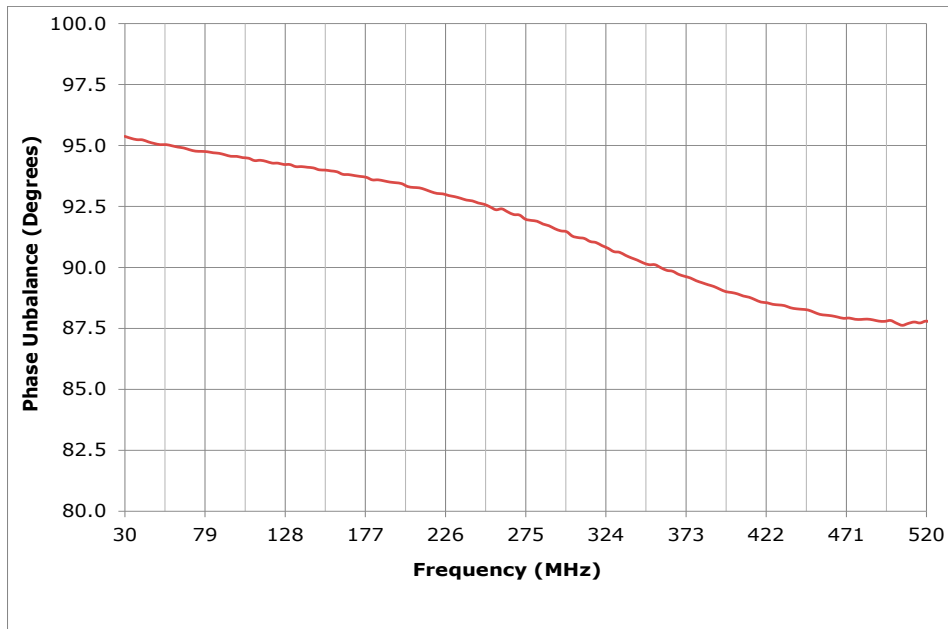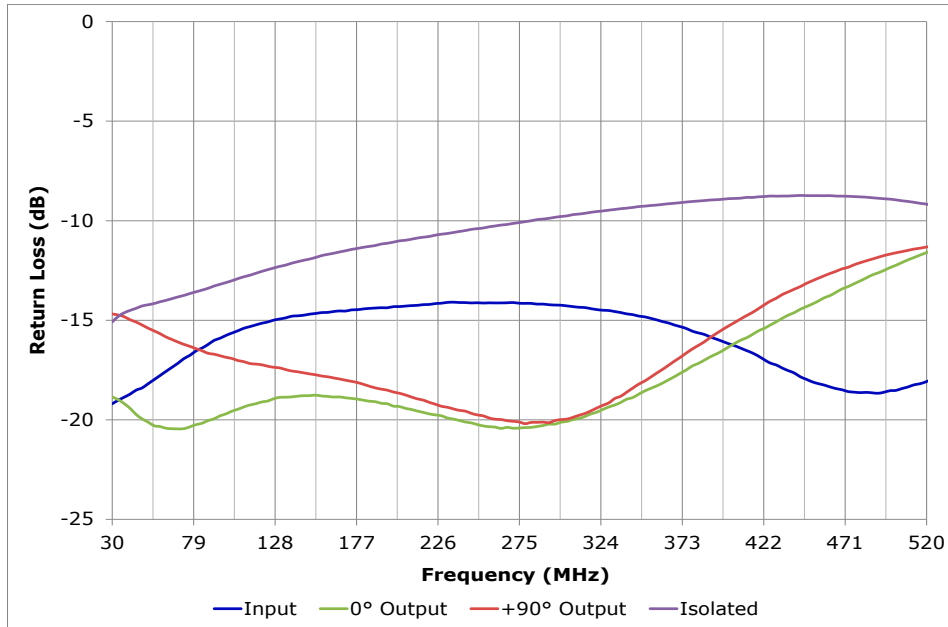

PERFORMANCE PLOTS