

# 90° HYBRID

## SURFACE MOUNT MODEL: SLQ-K02

**OCTAVE BANDWIDTH**

**40 - 80 MHz**

**FEATURES:**


- ▶ Excellent Performance
- ▶ Small Size, Surface Mount
- ▶ Building Block For:
  - Power Amplifiers
  - Image Rejection Mixers
  - I & Q / SSB Modulators
  - Phase Shifters & More...



**SPECIFICATIONS (Rev. E 11/24/09)**

Frequency	40 - 80 MHz	
Insertion Loss (dB) *	Typ.	Max.
	0.3	0.6
Amplitude Unbalance	Typ.	Max.
	0.5	0.8
Phase Unbalance	Typ.	Max.
	1°	3°
Isolation (dB)	Typ.	Min.
	28	20
Input Power	1 Watt (Max.)	
Impedance	50 Ohms (Nom.)	
VSWR	1.15:1 (Typ.)	
Operating Temperature Range	-40 to +85 °C	
Storage Temperature Range	-55 to +100 °C	

\* Insertion loss is the average loss of the 2 coupling values in excess of the theoretical 3 dB coupling.

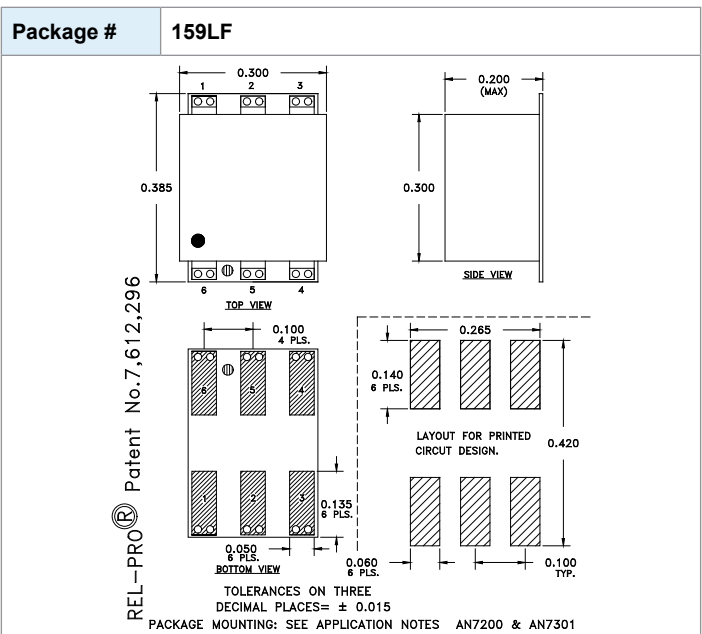

Port Configuration				
Input	Isolated*	+90° Output	0° Output	GND.**
6	5	1	2	3,4

\* Terminate ISOLATED port in 50 Ohms EXTERNALLY.  
 \*\* Ground Externally



# 90° HYBRID

## SURFACE MOUNT MODEL: SLQ-K02

OCTAVE BANDWIDTH

40 - 80 MHz

Data @ 25°C

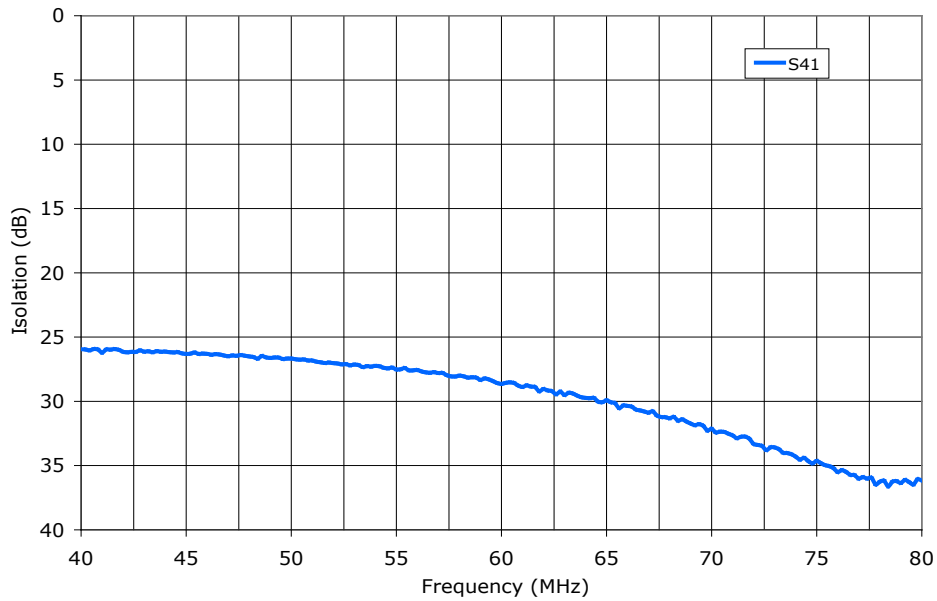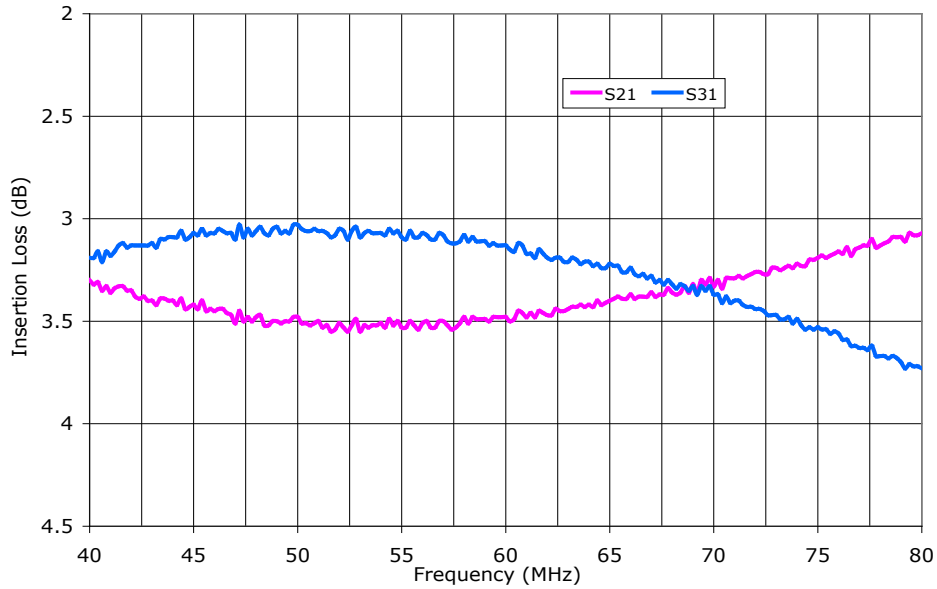

PERFORMANCE PLOTS



# 90° HYBRID

## SURFACE MOUNT MODEL: SLQ-K02

OCTAVE BANDWIDTH

40 - 80 MHz

Data @ 25°C

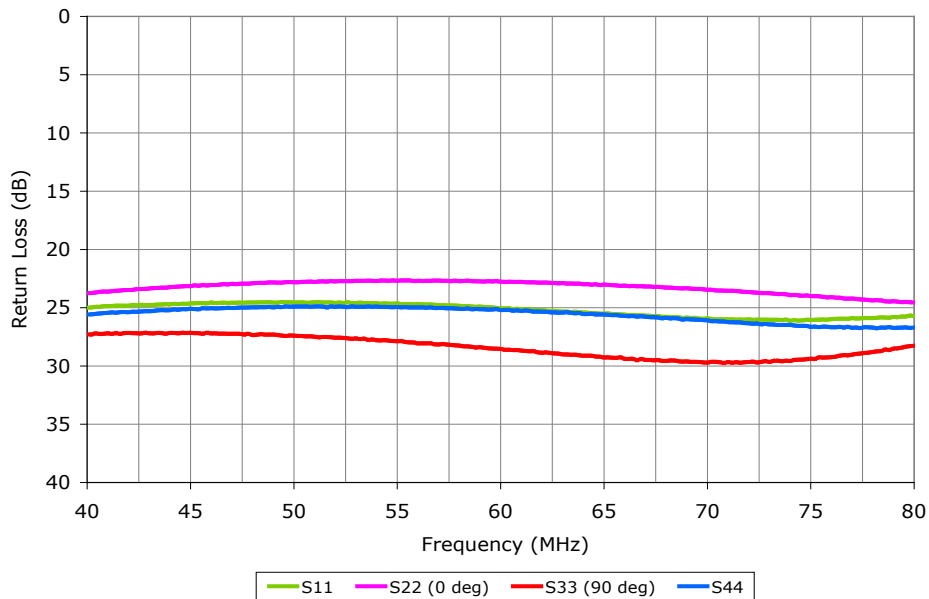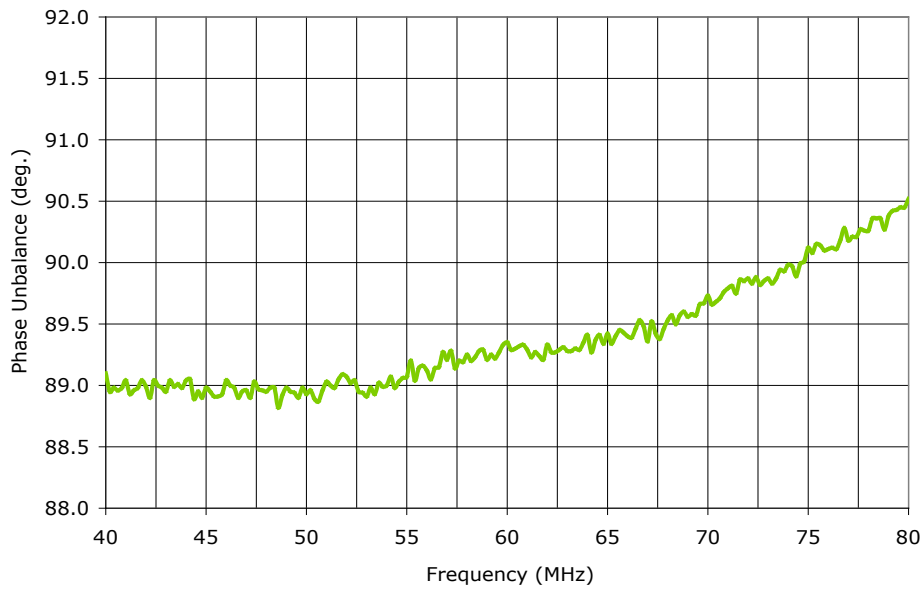

PERFORMANCE PLOTS




# 90° HYBRID

## SURFACE MOUNT MODEL: SLQ-K02

OCTAVE BANDWIDTH

40 - 80 MHz

Data @ 25°C

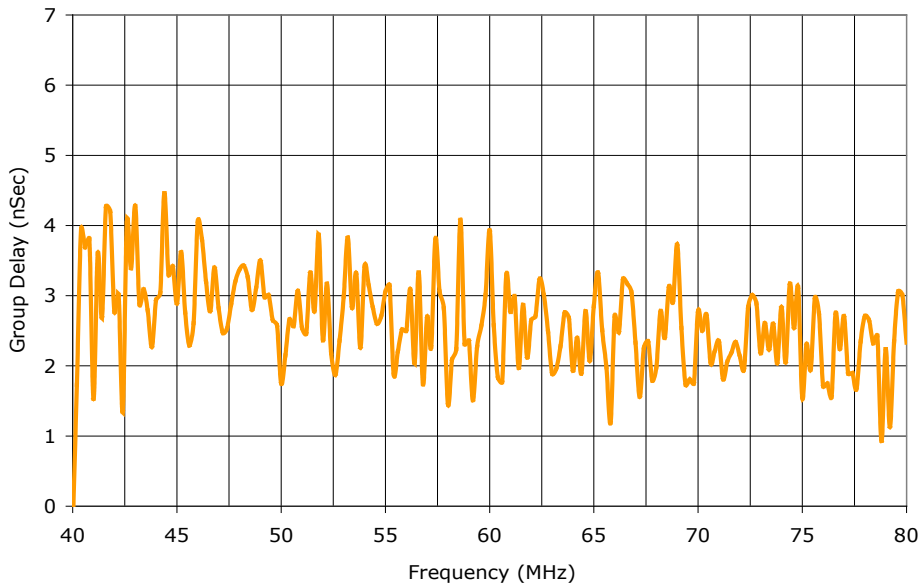

PERFORMANCE PLOTS

