

REFERENCE PHASE LOCKED TRANSLATOR

SURFACE MOUNT MODEL: FCTS800-10-5

FIXED FREQUENCY


800 MHz

FEATURES:

- ▶ Ultra-Low Phase Noise
- ▶ No Programming Required
- ▶ Lead Free - RoHs Compliant
- ▶ Patented REL-PRO Technology
- ▶ Small Size, Surface Mount



Phase Noise (Measured with Agilent E5052A or R&S FSUP-26/27)

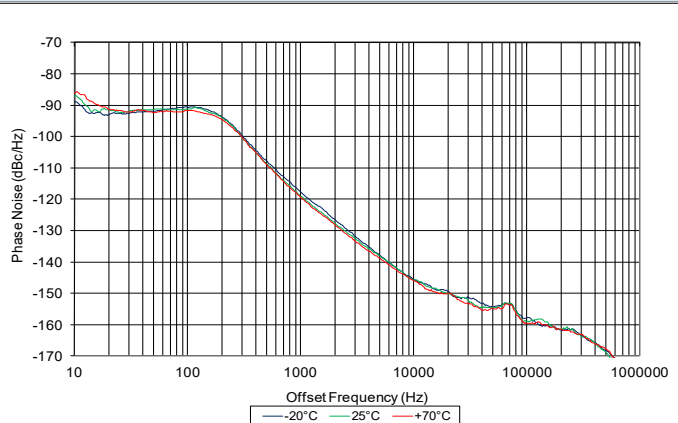

SPECIFICATIONS


Frequency	800 MHz		
Reference Input Frequency	10 MHz ¹		
Reference Input Voltage	1.0 to 3.3 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max.)
	Digital	+5	25
	Tune	+12	10
	VCO	+5	30
Output Power	0 dBm (Min.)		
Spurious Suppression	80 dB (Typ.)		
Harmonic Suppression	18 dB (Typ.)		
Output Impedance	50 Ohms (Nom.)		
Lock Detect Indicator	CMOS 3.3 V		
Typical Phase Noise	Offset	Phase Noise	
	@ 100 Hz	-87 dBc/Hz	
	@ 1 kHz	-116 dBc/Hz	
	@ 10 kHz	-144 dBc/Hz	
	@ 100 kHz	-158 dBc/Hz	
Operating Temperature Range	-20 to +70 °C		

¹ External 10 MHz reference sources should have phase noise better than -138 dBc/Hz @ 50 Hz offset to achieve published specifications.

Absolute Maximum Ratings

Storage Temp. Range	-40 to +85 °C
Bias Voltage (Digital)	+5.25 V
Bias Voltage (Tune)	+13.0 V
Bias Voltage (VCO)	+5.5 V

Patent : <http://www.synergymwave.com/patents>

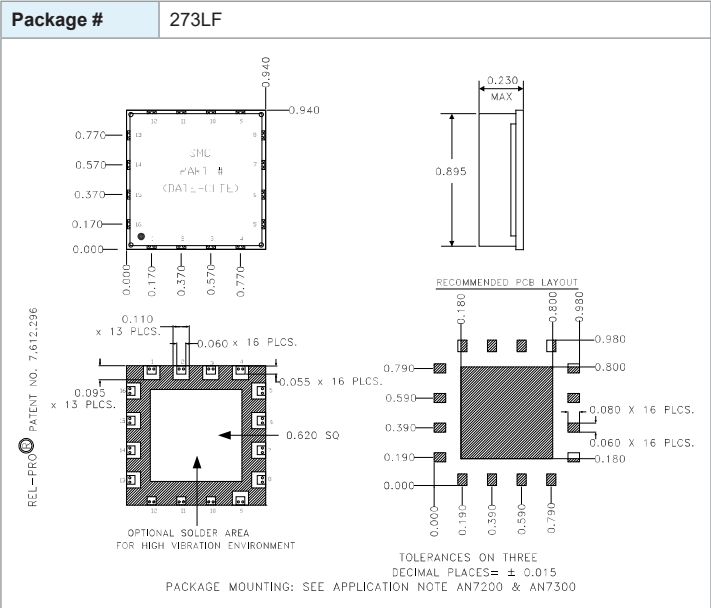

PORT CONFIGURATION

Pin 6 - Ref. Input	Pin 13 - RF Out	NC - Not Connected
Pin 7 - Vcc 1 (Digital)	Pin 14 - Lock Detect	
Pin 8 - Vcc 2 (Tune)	Pin 1,2,3,4,5,15,16 - NC	
Pin 9 - Vcc 3 (VCO)	Pin 10,11,12 - GND.	

* High when locked (source/sink 500 uA)

REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5


FIXED FREQUENCY

800 MHz


@ -20 °C

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

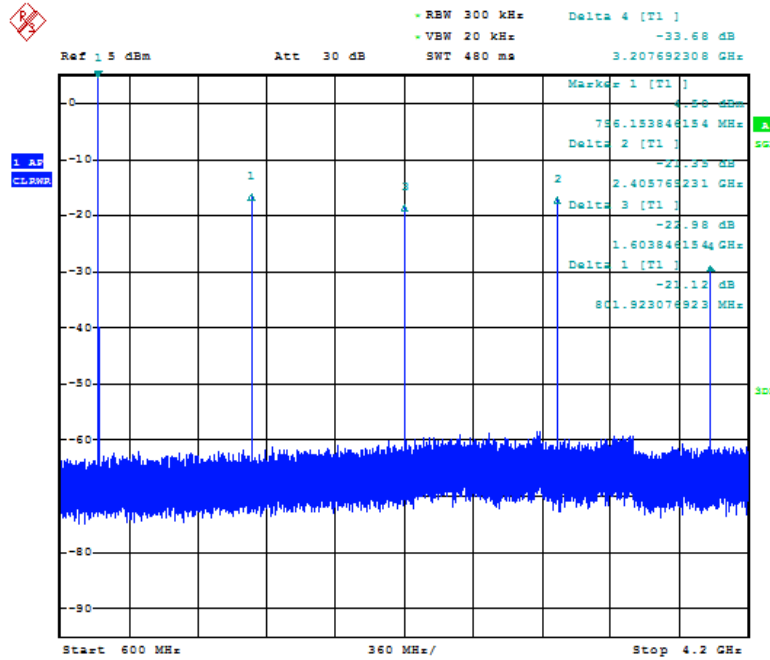

REFERENCE SIDEBAND SUPPRESSION

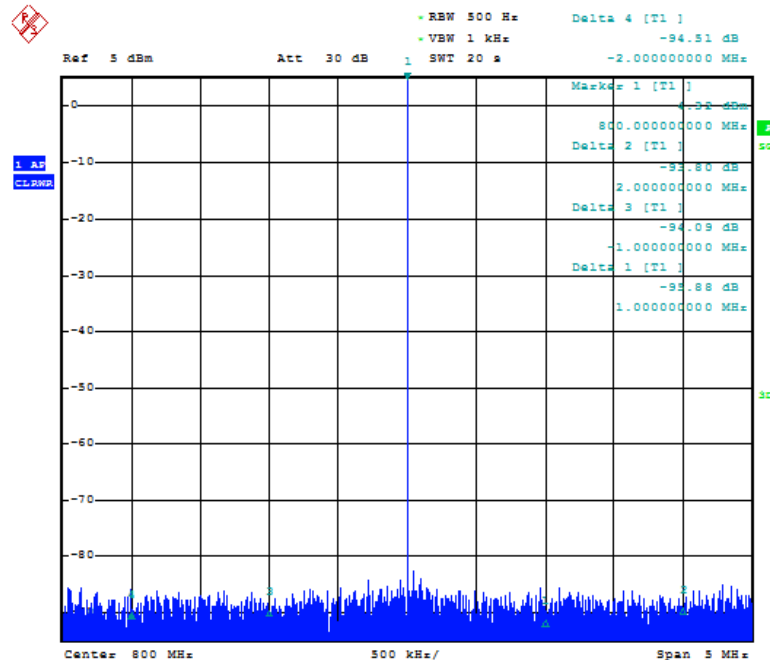


REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5

FIXED FREQUENCY

800 MHz

REFERENCE SIDEBAND SUPPRESSION

@ -20 °C

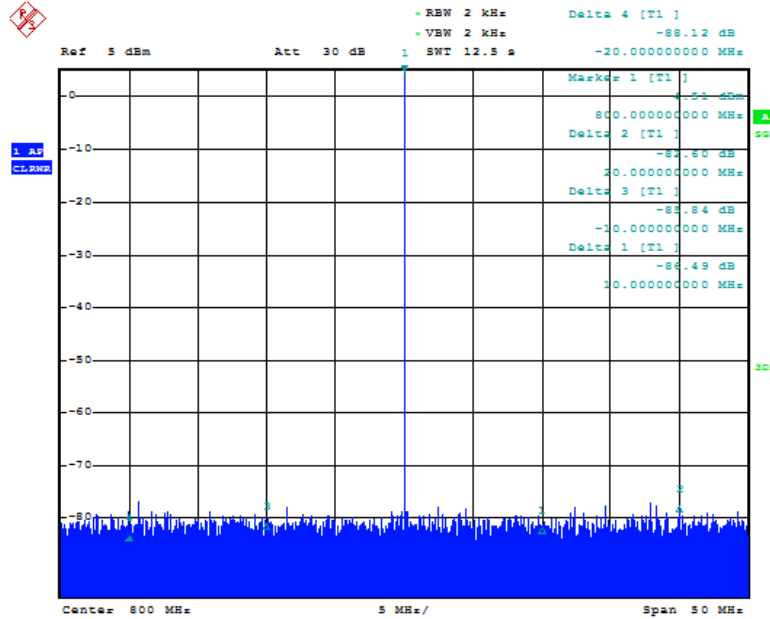

PERFORMANCE PLOTS

REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5


FIXED FREQUENCY

800 MHz


@ +25 °C

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

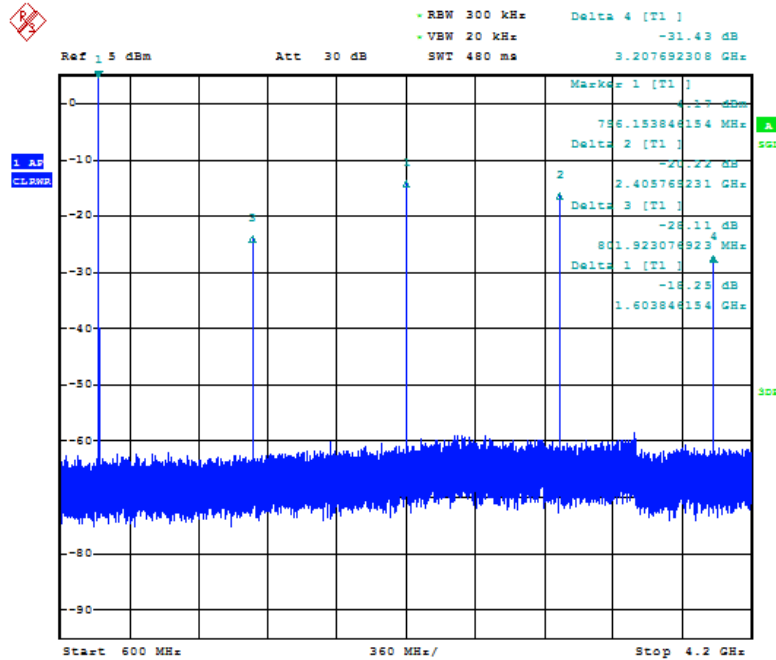

REFERENCE SIDEBAND SUPPRESSION

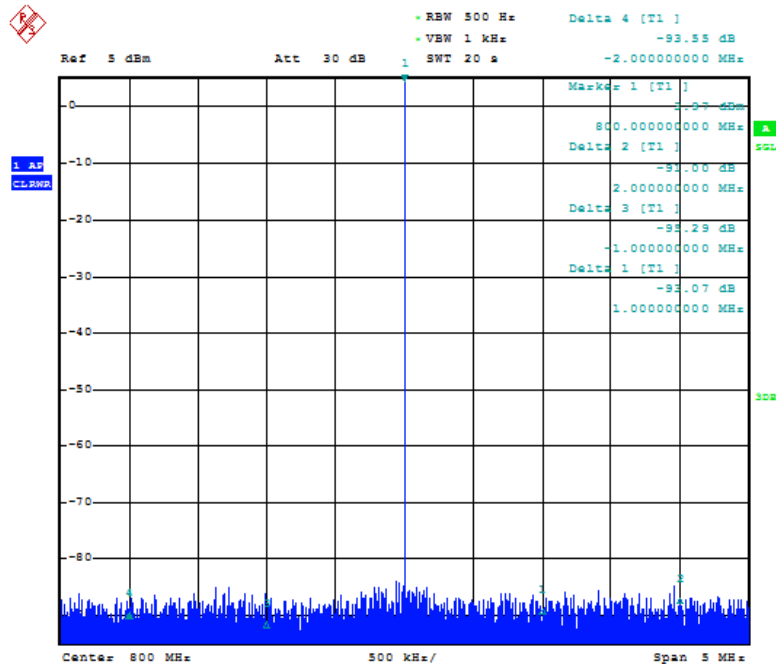


REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5

FIXED FREQUENCY

800 MHz

REFERENCE SIDEBAND SUPPRESSION

@ +25 °C

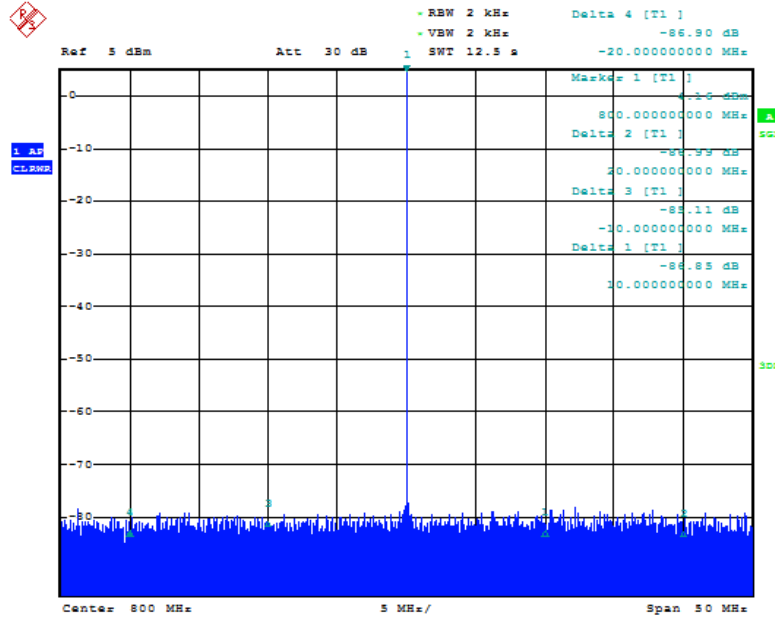

PERFORMANCE PLOTS

REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5


FIXED FREQUENCY

800 MHz


@ +70 °C

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

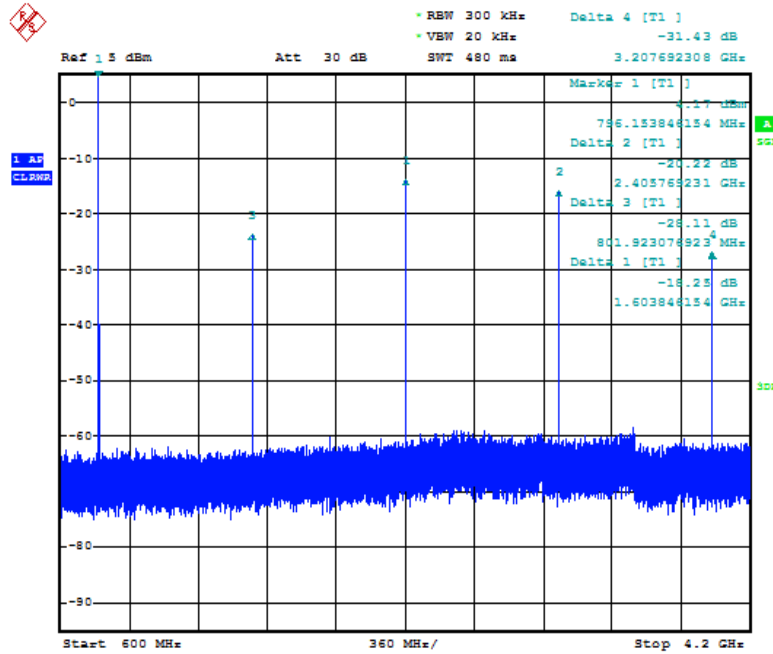

REFERENCE SIDEBAND SUPPRESSION

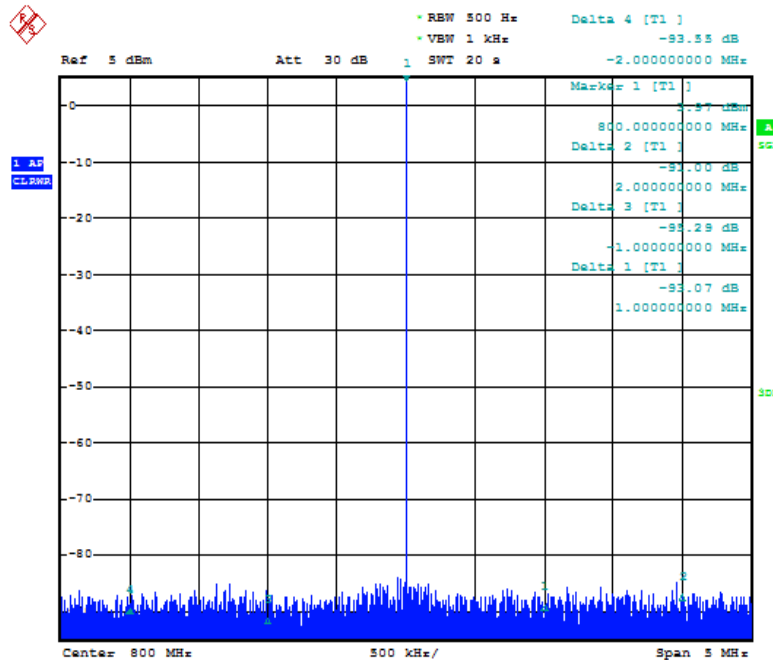


REFERENCE PHASE LOCKED TRANSLATOR SURFACE MOUNT MODEL: FCTS800-10-5

FIXED FREQUENCY

800 MHz

REFERENCE SIDEBAND SUPPRESSION

@ +70 °C

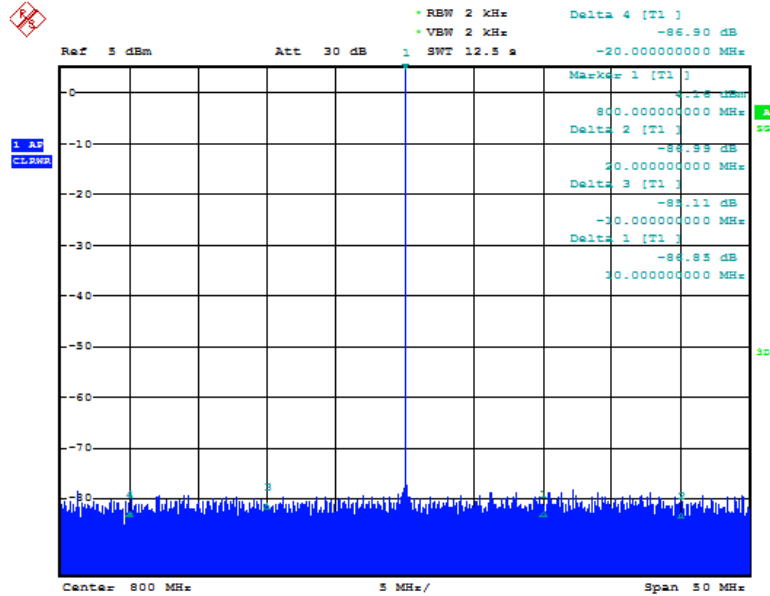

PERFORMANCE PLOTS