

INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSW110250-100

WIDE BANDWIDTH


1100 - 2500 MHz

FEATURES:

- ▶ Exceptionally Low Phase Noise
- ▶ Interactive Communication
- ▶ Standard Programming Interface
- ▶ Ultra Wide Tuning Range
- ▶ Lead Free - RoHS Compliant
- ▶ Patented REL-PRO® Technology
- ▶ Small Size, Surface Mount
- ▶ Buffered Output



Phase Noise

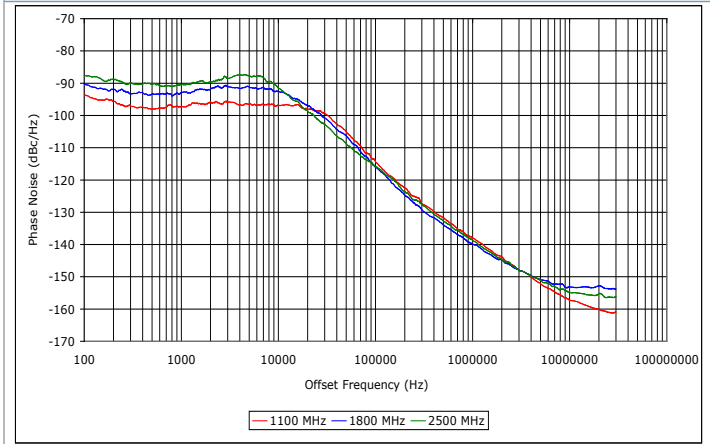


SPECIFICATIONS (Rev. C 01/12/18)

Frequency	1100 - 2500 MHz		
Step Size	1 MHz		
Reference Input Frequency	10 MHz ¹		
Reference Input Voltage	1 V p-p to 3.3 V p-p		
Bias Voltage	Vcc	V (Vdc)	I (mA Max.)
	Digital	+5	50
	VCO	+5	35
	Converter	+5	55
Output Power	+5 dBm (Min.)		
Spurious Suppression	70 dB (Typ.)		
Harmonic Suppression	20 dB (Typ.)		
Settling Time	10 mSec (Typ.) ²		
Output Impedance	50 Ohms (Nom.)		
Lock Detect Indicator	CMOS 3.3 V		
Typical Phase Noise	Offset	Phase Noise	
	@ 1 kHz	-92 dbc/Hz	
	@ 10 kHz	-92 dbc/Hz	
	@ 100 kHz	-115 dbc/Hz	
Operating Temperature Range	-40 to +85 °C		
Programming	See Application Note: AN7100		

¹ Reference input frequency is programmable (see AN7100) in multiples of the step size, 10 MHz is the default setting. 150 MHz (Max.)

² From the rising edge of LE to stable lock detect

Package # 197LF

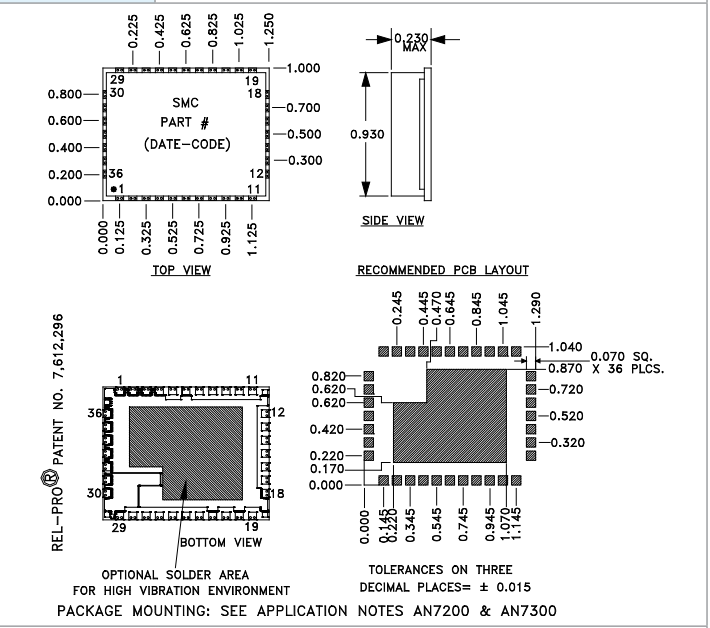

Absolute Maximum Ratings

Storage Temp. Range	-55 to +125 °C
Bias Voltage (Digital)	+5.25 V
Bias Voltage (VCO)	+5.5 V
Bias Voltage (Converter)	+8 V
DC Voltage Applied to RF Out	±25 V

Port Configuration		
Pin 5 - RF out	Pin 21 - Ref. In	Pin 8,12,14,15,16,17 - NC
Pin 7 - Lock Detect Out *	Pin 23 - Vcc (Digital)	All Others - Ground
Pin 9 - Data In	Pin 24 - Vtune (Output)	
Pin 10 - Error Flag	Pin 25 - Vcc (VCO)	NC - No Connection
Pin 11 - Clock In	Pin 26 - Vout (Converter) ***	
Pin 13 - VCO (On/Off)****	Pin 27 - Vcc (Tune) ***	
Pin 19 - Latch Enable In	Pin 28 - Vcc (Converter)	

* High when locked (source/sink 500 uA)

*** Connect externally. Bypassed with a 10uF 35V tantalum capacitor.

**** Open "VCO ON", Grounded (VCO OFF)


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW110250-100


WIDE BANDWIDTH

1100 - 2500 MHz

HARMONIC SUPPRESSION

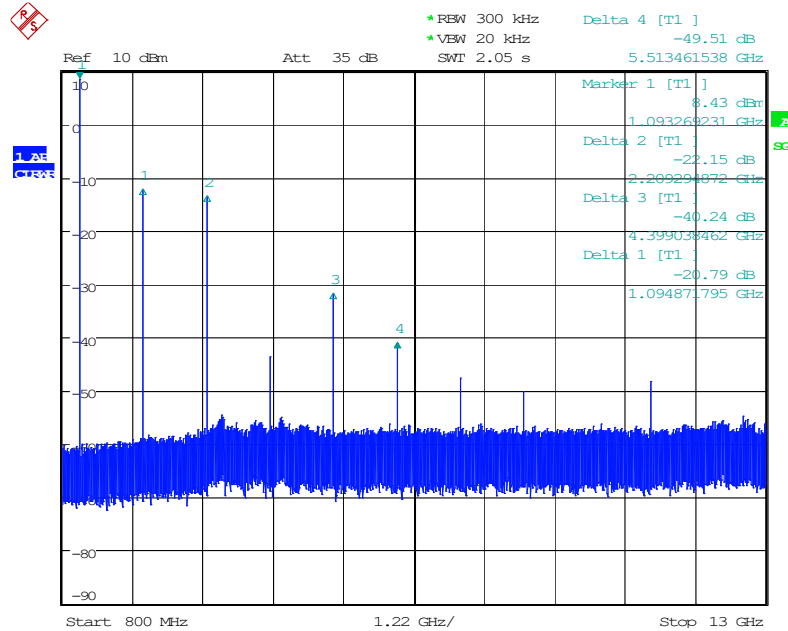

REFERENCE SIDEBAND SUPPRESSION

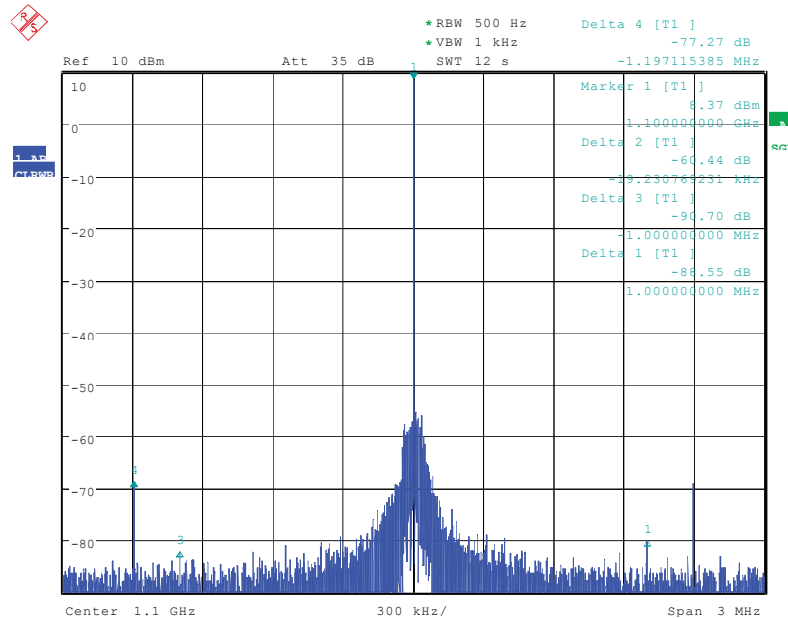

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW110250-100

WIDE BANDWIDTH

1100 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

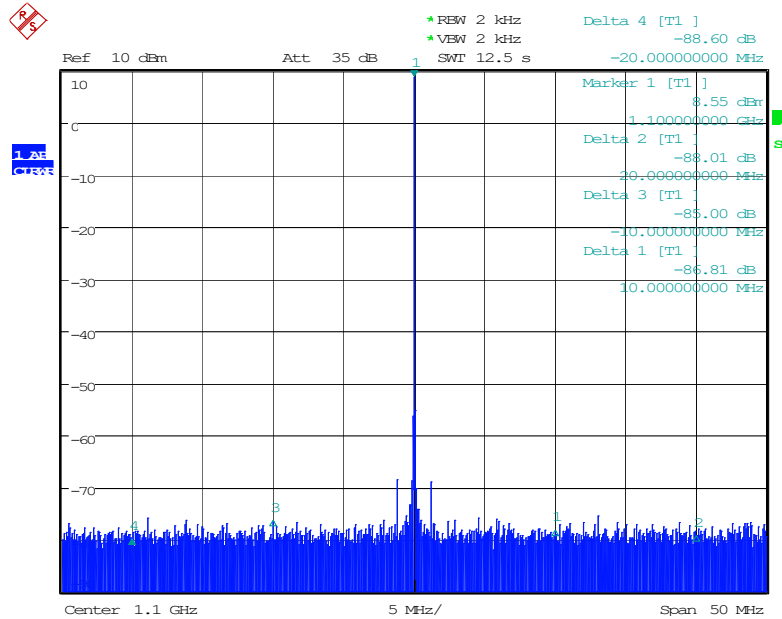

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW110250-100


WIDE BANDWIDTH

1100 - 2500 MHz

HARMONIC SUPPRESSION

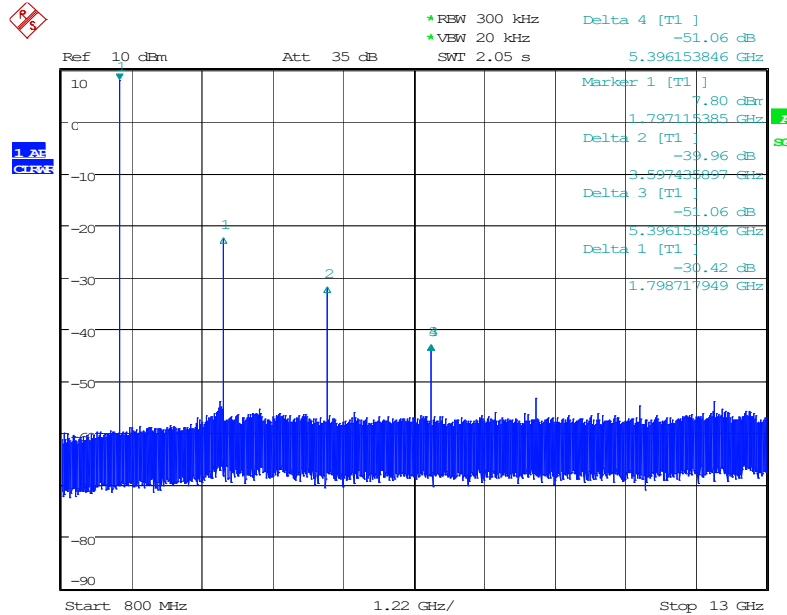

REFERENCE SIDEBAND SUPPRESSION

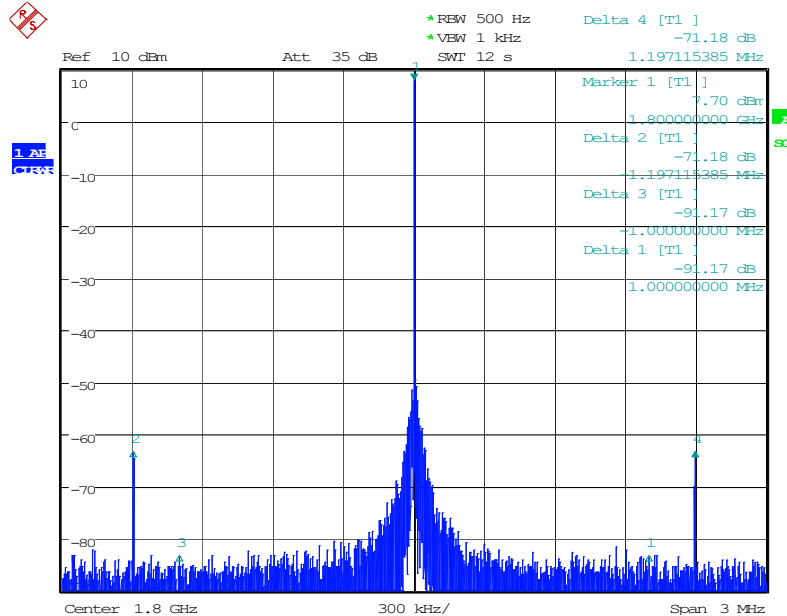

PERFORMANCE PLOTS


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW110250-100

WIDE BANDWIDTH

1100 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

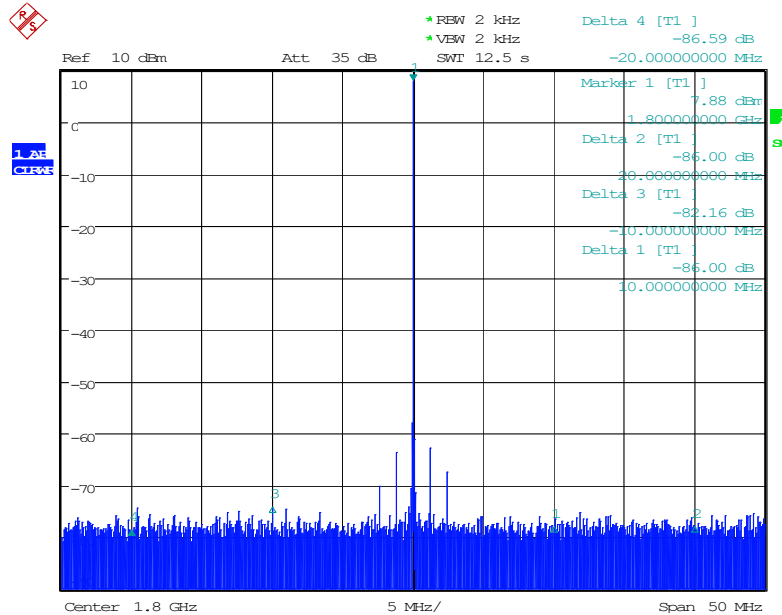

PERFORMANCE PLOTS

INTELLIGENT INTERACTIVE SYNTHESIZER


SURFACE MOUNT MODEL: LFSW110250-100

WIDE BANDWIDTH


1100 - 2500 MHz

PERFORMANCE PLOTS

HARMONIC SUPPRESSION

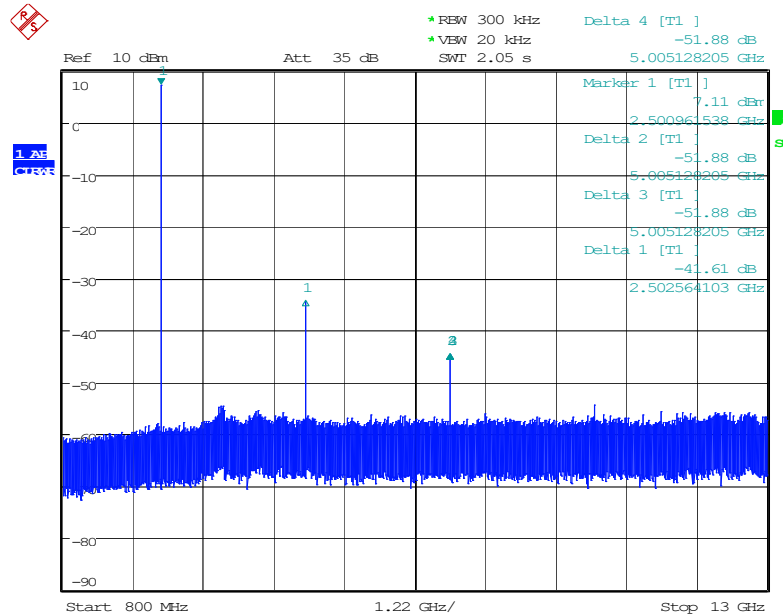

REFERENCE SIDEBAND SUPPRESSION

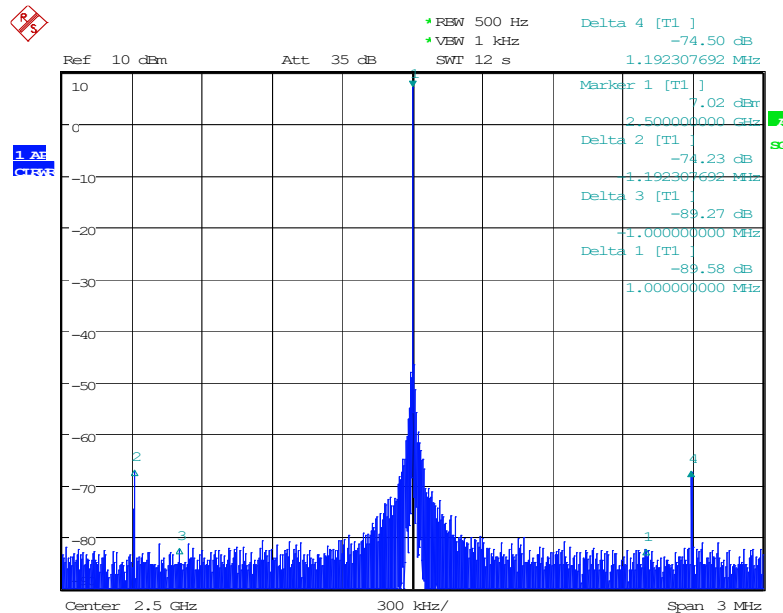


INTELLIGENT INTERACTIVE SYNTHESIZER

SURFACE MOUNT MODEL: LFSW110250-100

WIDE BANDWIDTH

1100 - 2500 MHz

REFERENCE SIDEBAND SUPPRESSION

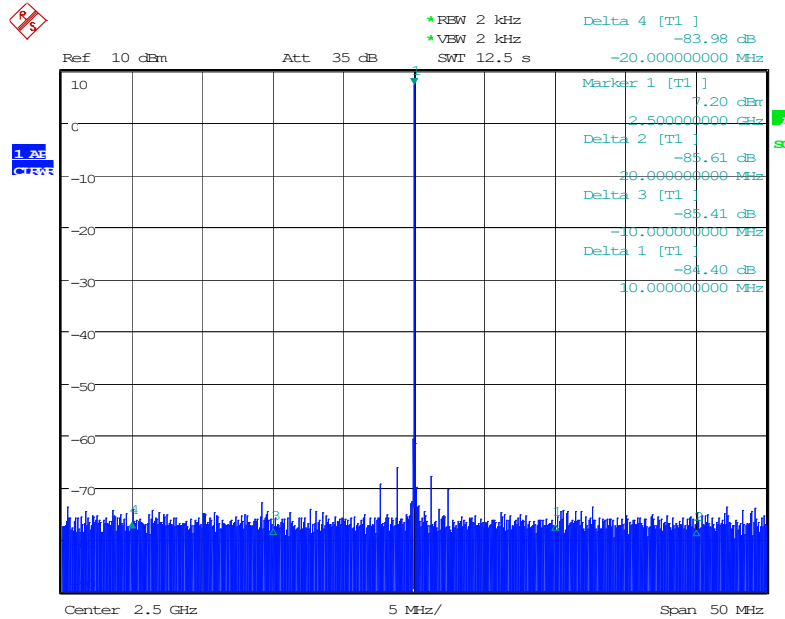

PERFORMANCE PLOTS