

6-WAY POWER DIVIDER

CONNECTORIZED MODEL: DFK-7B1S

WIDE BANDWIDTH


1 - 100 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Wide Bandwidth
- ▶ Small Size
- ▶ Moderate Power
- ▶ Lead Free RoHS Compliant

APPLICATIONS:

- ▶ Signal Splitting & Low Power Combining

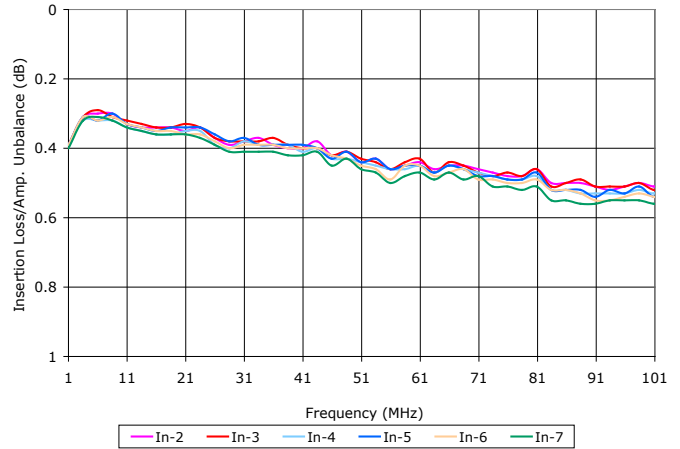

SPECIFICATIONS (Rev. G 11/21/11)

Frequency	1 - 100 MHz		
Insertion Loss (dB) *	Freq. (MHz)	Typ.	Max.
	1 - 10	0.3	0.6
	10 - 50	0.4	0.7
Isolation (dB)	Freq. (MHz)	Typ.	Min.
	1 - 10	30	25
	10 - 50	30	25
Phase Unbalance	Freq. (MHz)	Typ.	Max.
	1 - 10	0.2	1°
	10 - 50	0.5	2°
Amplitude Unbalance (dB)	Freq. (MHz)	Typ.	Max.
	1 - 10	0.05	0.2
	10 - 50	0.05	0.3
Input Power **	1 Watt (Max.)		
	VSWR		
	1.2:1 (Typ.)		
Impedance			
50 Ohms (Nom.)			
Operating Temperature Range			
-40 to +85 °C			

* Above 7.78 dB theoretical split loss.
 ** Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.

Package # 142

4-40 UNC-2B TAPPED HOLE 0.250 DP ON FAR SIDE.

Connector Type: SMA Female

PORT CONFIGURATION	
Input	Output
1	2,3,4,5,6,7





6-WAY POWER DIVIDER

CONNECTORIZED MODEL: DFK-7B1S

WIDE BANDWIDTH

1 - 100 MHz

DATA @ 25°C

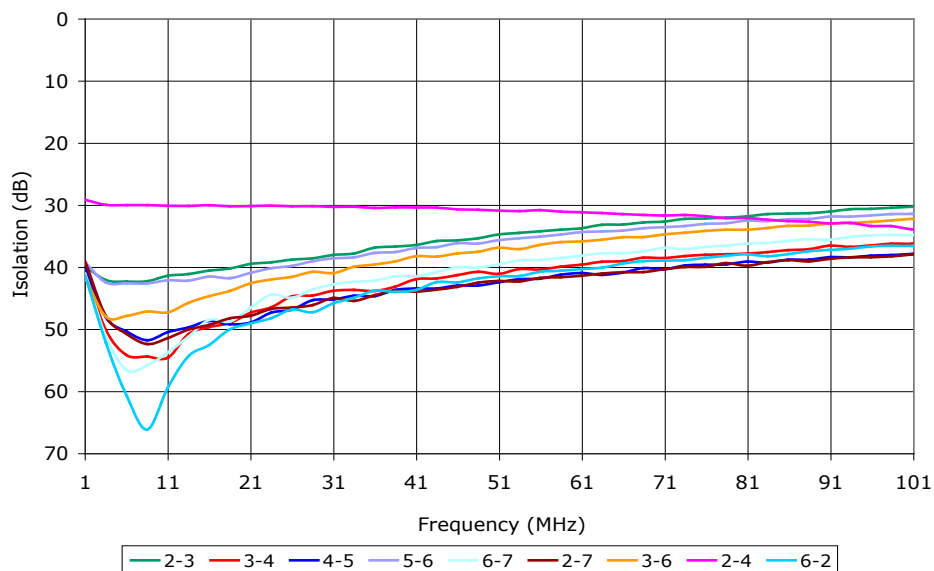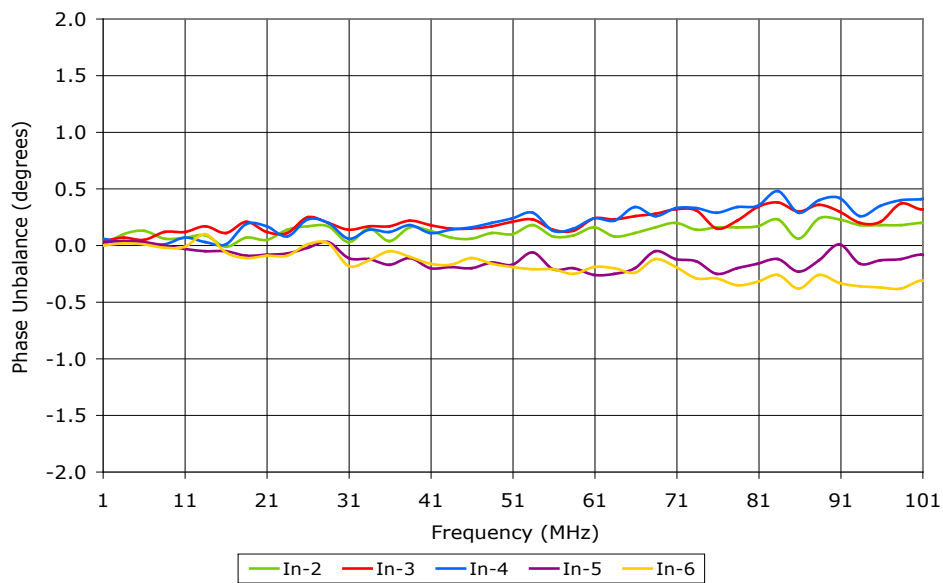

PERFORMANCE PLOTS



6-WAY POWER DIVIDER

CONNECTORIZED MODEL: DFK-7B1S

WIDE BANDWIDTH

1 - 100 MHz

DATA @ 25°C

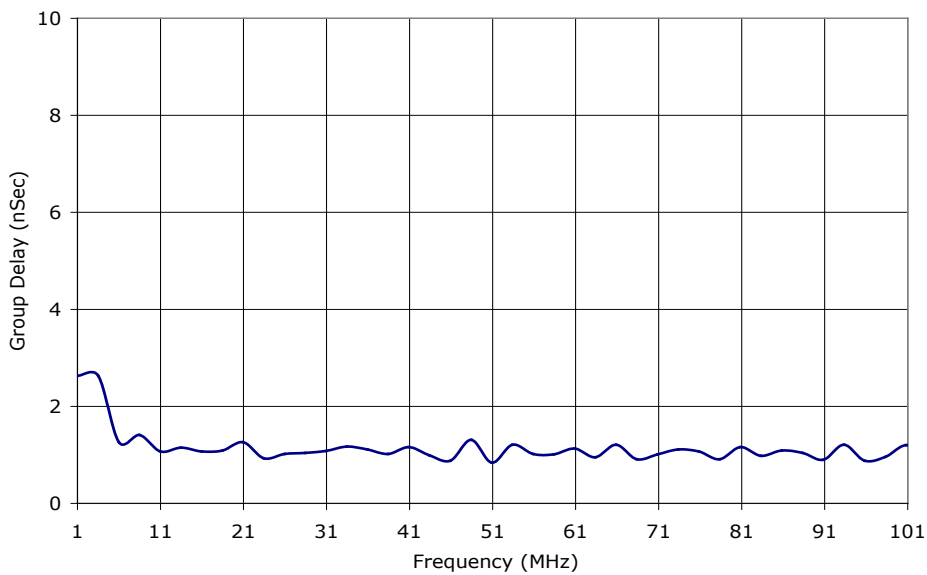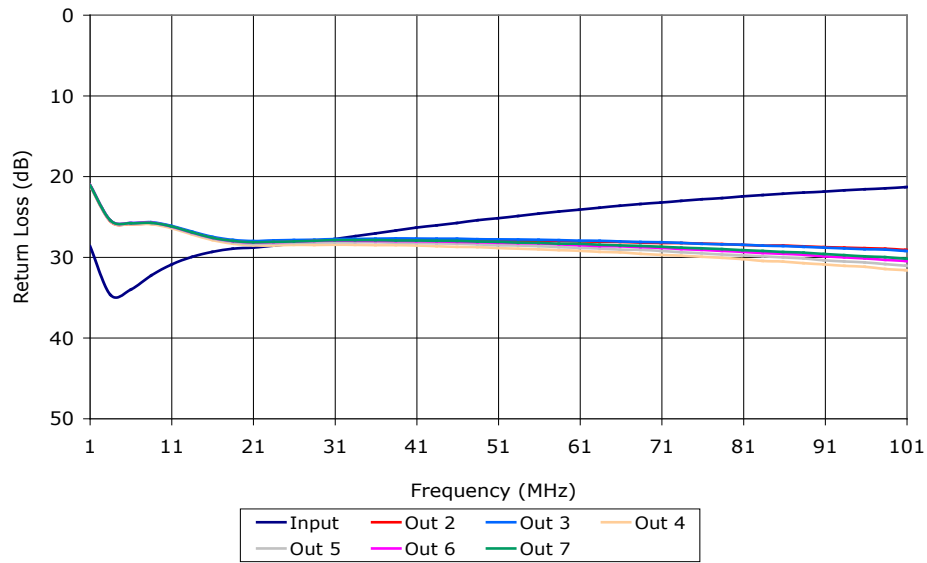

PERFORMANCE PLOTS