

VOLTAGE CONTROLLED OSCILLATOR


SURFACE MOUNT MODEL: DCYS10002000-5

X to K BAND


10000 - 20000 MHz

FEATURES:

- ▶ Exceptional Phase Noise Performance
- ▶ Small Size, Surface Mount
- ▶ Lead Free Patented REL-PRO® Technology
- ▶ Buffered Output




Phase Noise

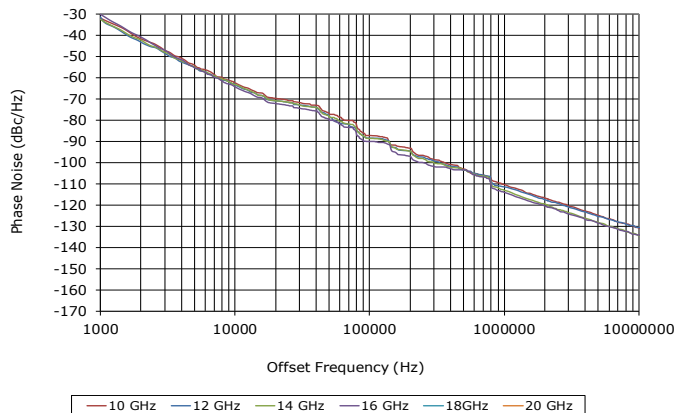

SPECIFICATIONS (Rev. A 02/19/20)

Frequency	10000 - 20000 MHz	
Tuning Voltage	0.5 to 15 Vdc	
Bias Voltage (Vcc 1)	-1.2 to -2.0 VDC @ 5 mA (Typ.)	
Bias Voltage (Vcc 2)	+5 VDC @ 150 mA (Max.)	
Output Power	6 dBm (Min.)	
Tuning Sensitivity	400 - 1700 MHz/V (Typ.)	
Output Impedance	50 Ohms (Nom.)	
Harmonic Suppression	15 dB (Typ.)	
Sub-Harmonic	10 dB (Typ.)	
Frequency Pulling	144 MHz (Typ. @ 1.75:1 VSWR)	
Frequency Pushing	140 MHz/V (Typ.)	
Tuning Port Capacitance	15 pF (Typ.)	
Typical Phase Noise	Offset	dBc/Hz
	10 kHz	-64
	100 kHz	-90
Operating Temperature Range	-40 to +85 °C	

Package # 454

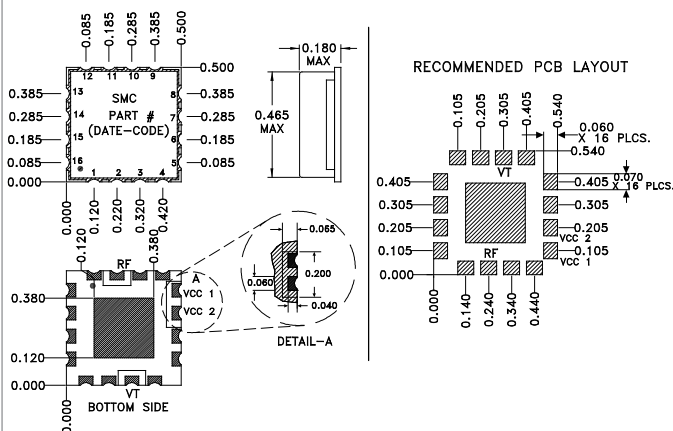

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7300

Pin Out Config

RF Out	Pin 1
Vcc 1	Pin 5
Vcc 2	Pin 6
Vtune	Pin 10
All Others	Case Ground

Absolute Maximum Ratings

Storage Temp. Range	-55 to +125 °C
Bias Voltage (VCC 1)	+5.5 V
Tuning Voltage (VCC 2)	-1.9 V
DC Voltage Applied to RF Out	±25 V



VOLTAGE CONTROLLED OSCILLATOR

SURFACE MOUNT MODEL: DCYS10002000-5

X to K BAND

10000 - 20000 MHz

PERFORMANCE PLOTS

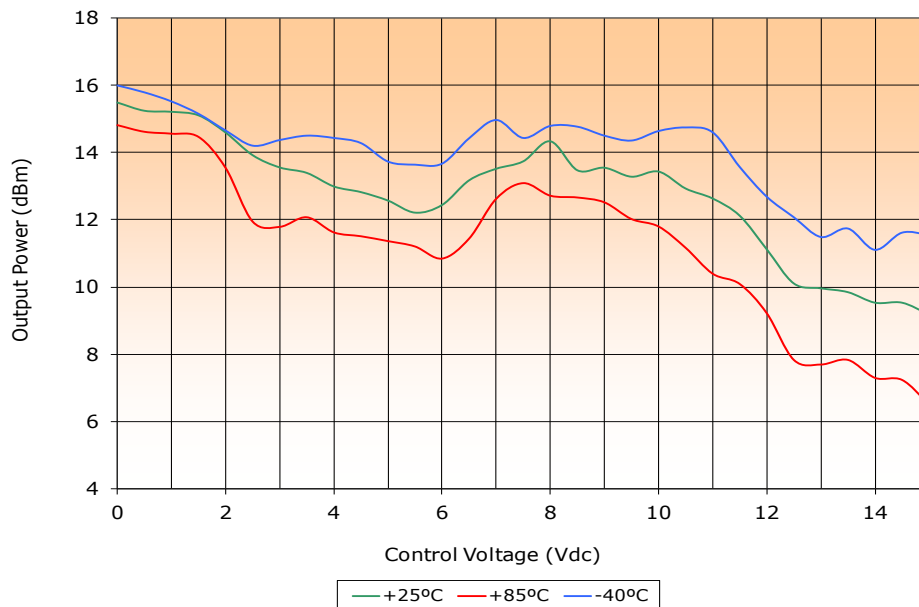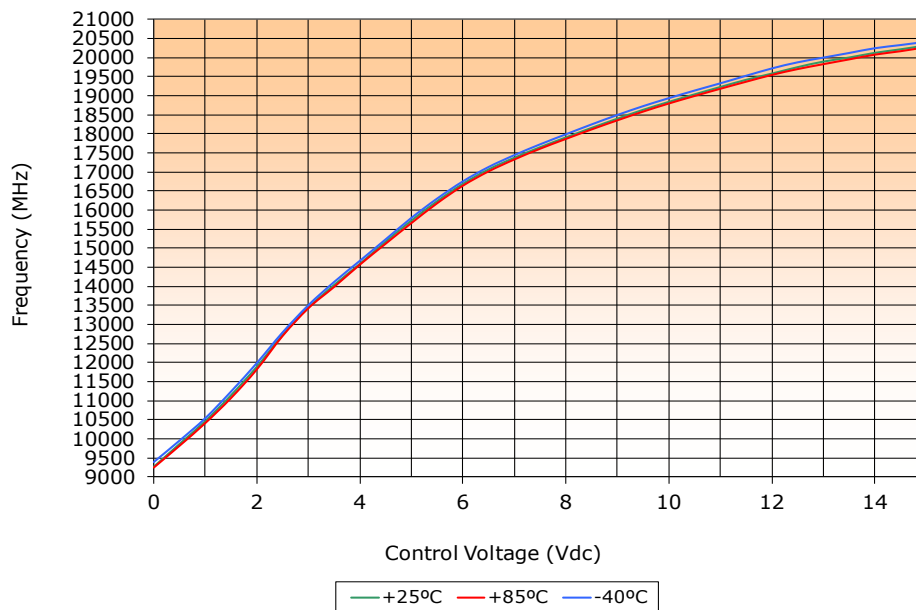

VOLTAGE CONTROLLED OSCILLATOR

SURFACE MOUNT MODEL: DCYS10002000-5

X to K BAND

10000 - 20000 MHz

PERFORMANCE PLOTS

